


product description: The T-piece is used to branch of cable trays running through JUPITER cable trays or cable ladders of the same width. To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with F and ZM surface finish. These items can also be ordered in a varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27  $\mu\text{m}$   
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45  $\mu\text{m}$  (min. 35  $\mu\text{m}$ )  
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31  $\mu\text{m}$









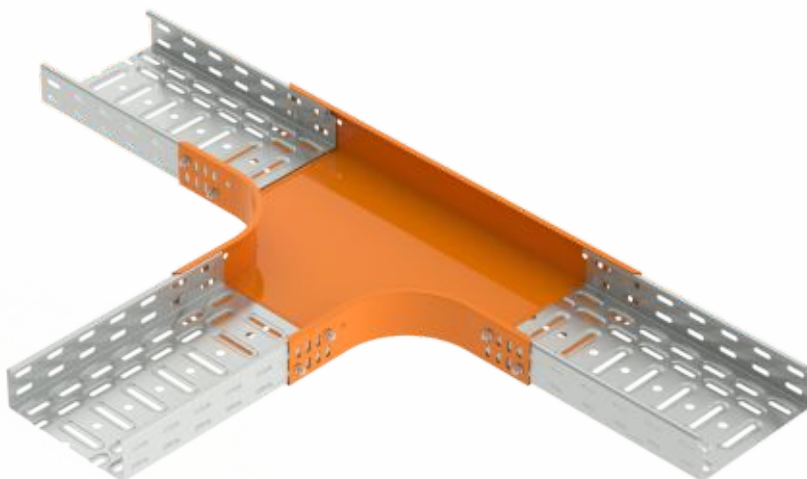





























sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification : ČSN 73 0895 P 90-R  
 DIN 4102-12 E 90  
 STN 92 0205 PS 90  
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1



type number	for width of cable tray (mm)	for height of cable tray (mm)	B (mm)	C (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pc)	
<b>T 35X50_S</b>						0,74		
<b>T 35X50_F</b>	50	35	253	453	0,8	0,85	12	
<b>T 35X75_S</b>	75	35	278	478	0,8	0,86	12	
<b>T 35X100_S</b>	100	35	303	503	0,8	0,99	12	
<b>T 35X150_S</b>	150	35	353	553	0,8	1,27	12	
<b>T 35X200_S</b>	200	35	403	603	1,0	1,89	15	
<b>T 35X300_S</b>	300	35	503	703	1,0	2,81	15	
<b>T 60X50_S</b>					0,8	0,88		
<b>T 60X50_F</b>	50	60	253	453	0,8	1,02	12	
<b>T 60x50_ZM</b>					0,75	0,78		
<b>T 60X75_S</b>	75	60	278	478	0,8	1,07	12	
<b>T 60X100_S</b>					0,8	1,14		
<b>T 60X100_F</b>	100	60	303	503	0,8	1,33	12	
<b>T 60x100_ZM</b>					0,75	1,04		
<b>T 60X150_S</b>					0,8	1,43		
<b>T 60X150_F</b>	150	60	353	553	0,8	1,66	12	
<b>T 60X200_S</b>						2,08		
<b>T 60X200_F</b>	200	60	403	603	1,0	2,42	15	
<b>T 60x200_ZM</b>						2,08		
<b>T 60X300_S</b>						3,02		
<b>T 60X300_F</b>	300	60	503	703	1,0	3,51	15	
<b>T 60x300_ZM</b>						3,02		
<b>T 60X400_S</b>						4,13		
<b>T 60X400_F</b>	400	60	603	803	1,0	4,79	18	
<b>T 60x400_ZM</b>						4,13		
<b>T 60X500_S</b>					1,0	5,34		
<b>T 60x500_ZM</b>	500	60	703	903	1,0	5,34	18	
<b>T 60X600_S</b>	600	60	803	1003	1,2	8,07	18	
<b>T 85X100_S</b>	100	85	303	503	0,8	1,45	24	
<b>T 85X150_S</b>	150	85	353	553	0,8	1,93	24	
<b>T 85X200_S</b>	200	85	403	603	1,0	2,43	27	
<b>T 85X300_S</b>	300	85	503	703	1,0	3,39	27	
<b>T 85X400_S</b>	400	85	603	803	1,0	4,51	30	
<b>T 110X150_S</b>					0,8	1,86		
<b>T 110X150_F</b>	150	110	353	553	0,8	2,15	24	
<b>T 110X200_S</b>						2,57		
<b>T 110X200_F</b>	200	110	403	603	1,0	2,98	27	
<b>T 110x200_ZM</b>						2,57		
<b>T 110X300_S</b>						3,55		
<b>T 110X300_F</b>	300	110	503	703	1,0	4,12	27	
<b>T 110x300_ZM</b>						3,55		
<b>T 110X400_S</b>						4,60		
<b>T 110X400_F</b>	400	110	603	803	1,0	5,34	30	
<b>T 110x400_ZM</b>						4,60		
<b>T 110X500_S</b>						5,98		
<b>T 110X500_F</b>	500	110	703	903	1,0	6,94	30	
<b>T 110x500_ZM</b>						5,98		
<b>T 110X600_S</b>					1,2	8,71		
<b>T 110X600_F</b>	600	110	803	1003	1,2	10,11	30	

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



T-piece