


type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
VKR 50_S					0,55	0,28	🔥
VKR 50_F	50	50	453	12	0,80	0,47	🔥
VKR 50_ZM					0,75	0,37	🔥
VKR 75_S	75	75	478	12	0,55	0,38	🔥
VKR 100_S					0,55	0,49	🔥
VKR 100_F	100	100	503	12	0,80	0,82	🔥
VKR 100_ZM					0,75	0,73	🔥
VKR 150_S					0,55	0,72	🔥
VKR 150_F	150	150	553	12	0,80	1,21	🔥
VKR 200_S					0,80	1,41	🔥
VKR 200_F	200	200	603	12	0,80	1,64	🔥
VKR 200_ZM					0,75	1,37	🔥
VKR 300_S					1,00	2,81	🔥
VKR 300_F	300	300	703	12	1,00	3,27	🔥
VKR 300_ZM					1,00	2,81	🔥
VKR 400_S					1,00	4,04	🔥
VKR 400_F	400	400	803	15	1,00	4,68	🔥
VKR 400_ZM					1,00	4,04	🔥
VKR 500_S					1,00	5,40	🔥
VKR 500_F	500	500	903	15	1,00	6,27	🔥
VKR 500_ZM					1,00	5,40	🔥
VKR 600_S	600	600	1003	15	1,00	6,30	🔥
VKR 600_F					1,00	7,30	🔥

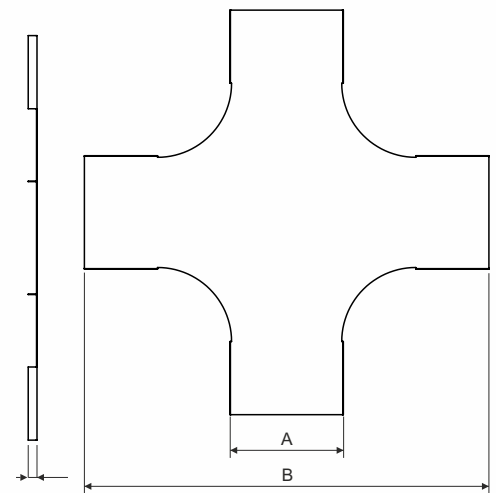

product description: This cover is used to cover the cross-over.
To fix the cover use 6 pcs of cover fixtures VU or NUV.
These items can also be ordered in a varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

psales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

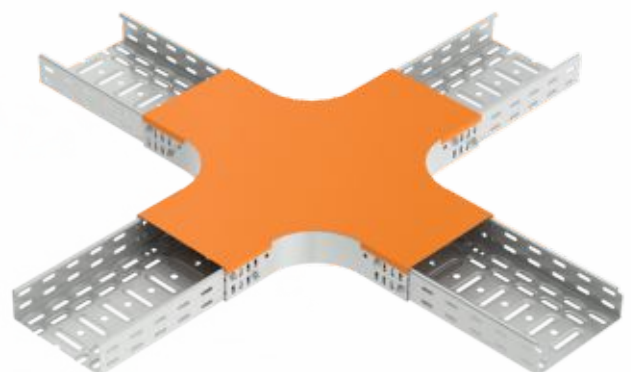

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



VKR