
Technical-Data-Sheet

No. 72

Repair tape

for repairing damaged cable sheaths

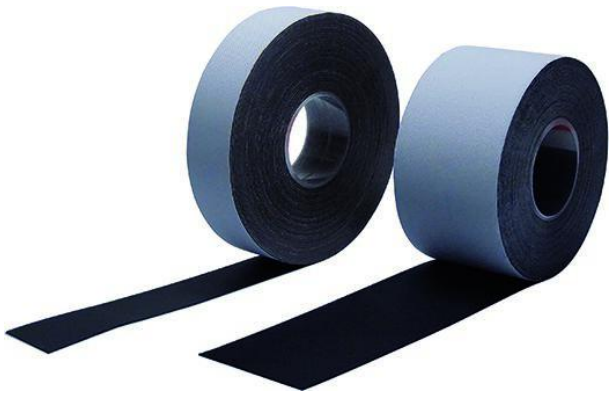

Product description

Article name	No. 72
Material number	125587
Characteristics	Self-amalgamating
	100 % waterproof
	Superior physical and electrical properties
	Exceptional resistance to prolonged immersion in water and against ozone
	Residue-free dissolvability of most substrates and therefore suitable for temporary repairs
Applications	Repair of damaged cable sheaths
Family notes	The use of a repair joint, such as MZ cast resin straight-through joint, is mandatory in case of damage extending beyond the cable sheath to the core insulation, screen or armour.

Technical data

Materials	PIB-Base
Length L	10 m
Width B	25 mm
Thickness	0.75 mm
Colours	black
Elongation at break	900 %
Elongation at break (associated standard)	BS 903
Tensile strength at break	2 MPa
Tensile strength at break (associated standard)	ASTM D 150
Heat resistance min	-40 °C
Heat resistance max	90 °C
Specific volume resistivity	10^{13} Ω cm
Specific volume resistivity (associated standard)	ASTM D 257
Dielectric strength	42 kV/mm
Dielectric strength (associated standard)	ASTM D 149

Logistics data

Delivery scope	Repair tape No. 72
Country of origin	Great Britain
Customs tariff number	40051000

EAN-UPC	4010311055695			
Base quantity	1	1	36	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	110	110	390	
Width	110	110	390	
Height	27	27	390	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.327	0.327	59.319	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.201	0.201	7.536	
Net weight	0.201	0.201	7.236	
Weight unit	Kilogram	Kilogram	Kilogram	