DVZ-CU-V-LD

Compression connector Cu

according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed) with a separator for copper conductors, suitable for joints.




Product description

Article name	DVZ-CU-V-LD 35
Material number	125899
Applications	Especially for transition joints and pot end joints
	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

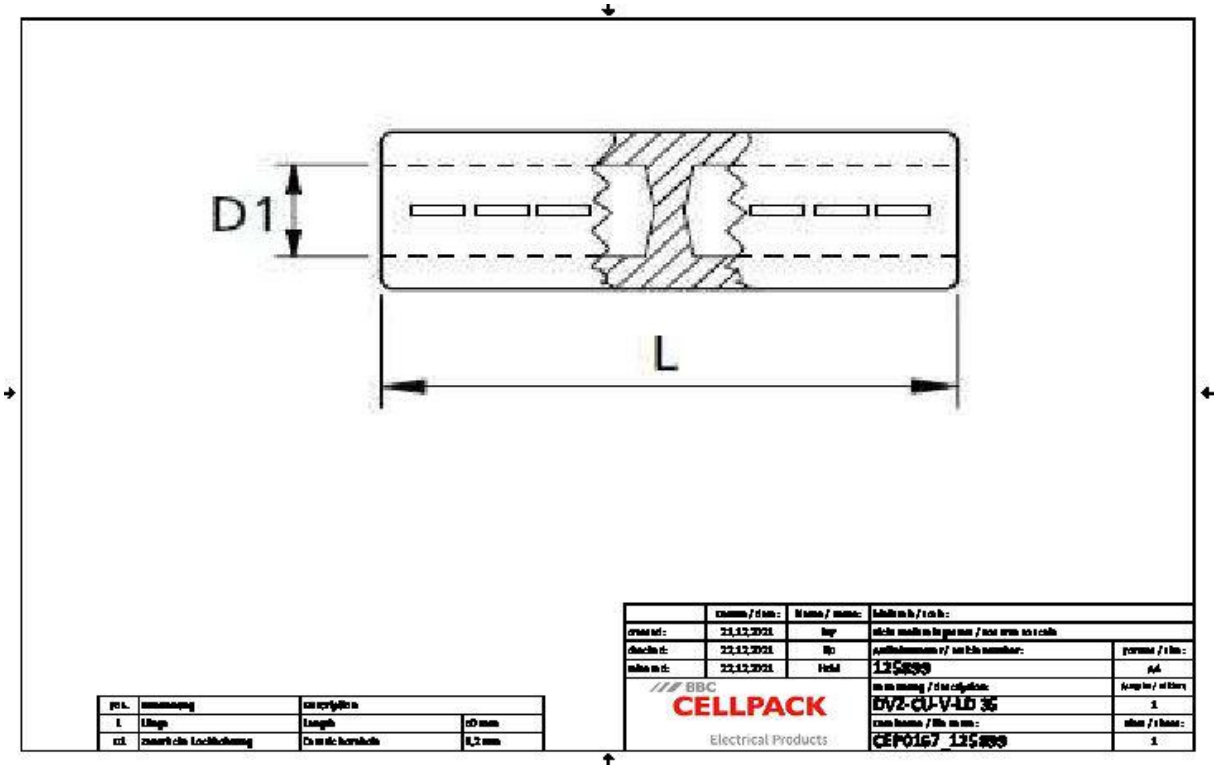

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	50 mm
Diameter D1	8.2 mm
Nominal cross section min	35 mm²
Nominal cross section max	35 mm²
Press die code K	12 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Germany
Customs tariff number	85369010

EAN-UPC	4010311053233			
Base quantity	1	1	25	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Case	
Lenght	47	47	90	
Width	13	13	82	
Height	13	13	55	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.008	0.008	0.406	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.031	0.031	1.075	
Net weight	0.031	0.031	0.775	
Weight unit	Kilogram	Kilogram	Kilogram	