Technical-Data-Sheet

DVZ-CU-V-LD

Compression connector Cu

according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed) with a separator for copper conductors, suitable for joints.




Product description

Article name	DVZ-CU-V-LD 70
Material number	125901
Applications	Especially for transition joints and pot end joints
	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

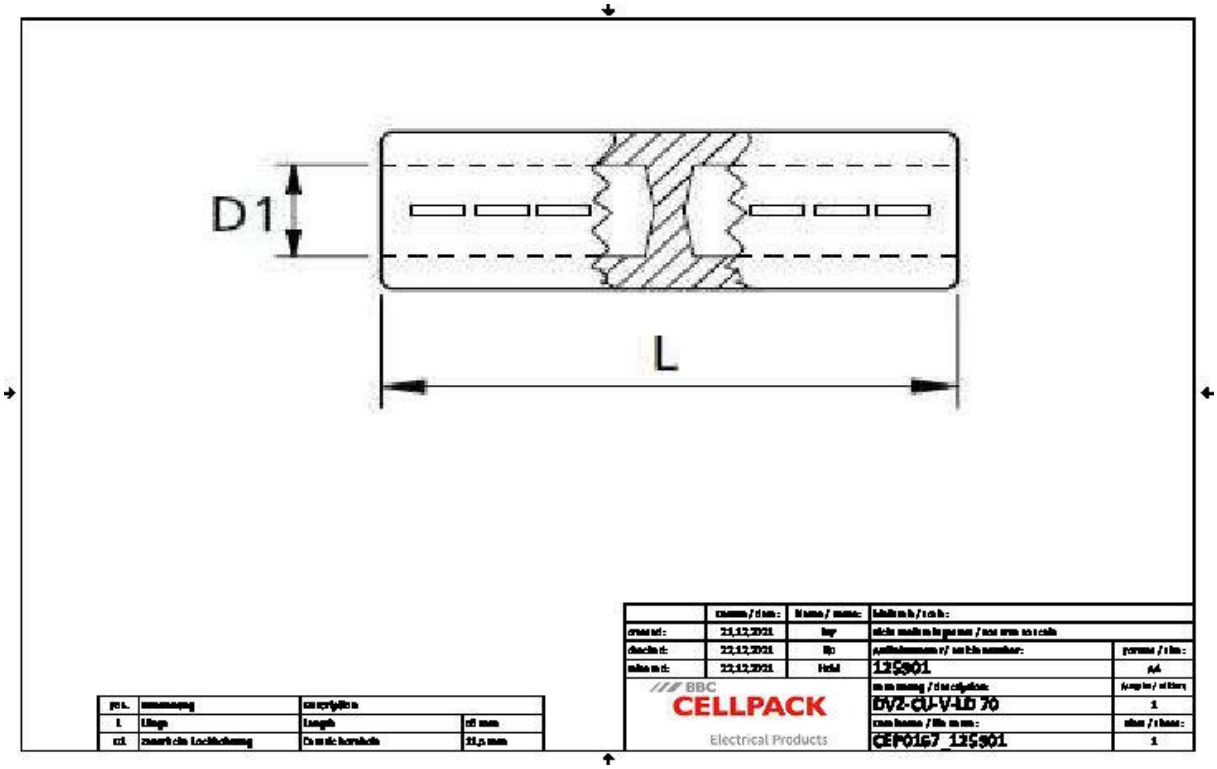

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	56 mm
Diameter D1	11.5 mm
Nominal cross section min	70 mm²
Nominal cross section max	70 mm²
Press die code K	16 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Germany
Customs tariff number	85369010

EAN-UPC	4010311053257			
Base quantity	1	1	25	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Case	
Lenght	55	55	140	
Width	18	18	110	
Height	18	18	60	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.018	0.018	0.924	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.057	0.057	1.725	
Net weight	0.057	0.057	1.425	
Weight unit	Kilogram	Kilogram	Kilogram	