DVZ-CU-V-LD

Compression connector Cu

according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed) with a separator for copper conductors, suitable for joints.




Product description

Article name	DVZ-CU-V-LD 95
Material number	125902
Applications	Especially for transition joints and pot end joints
	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

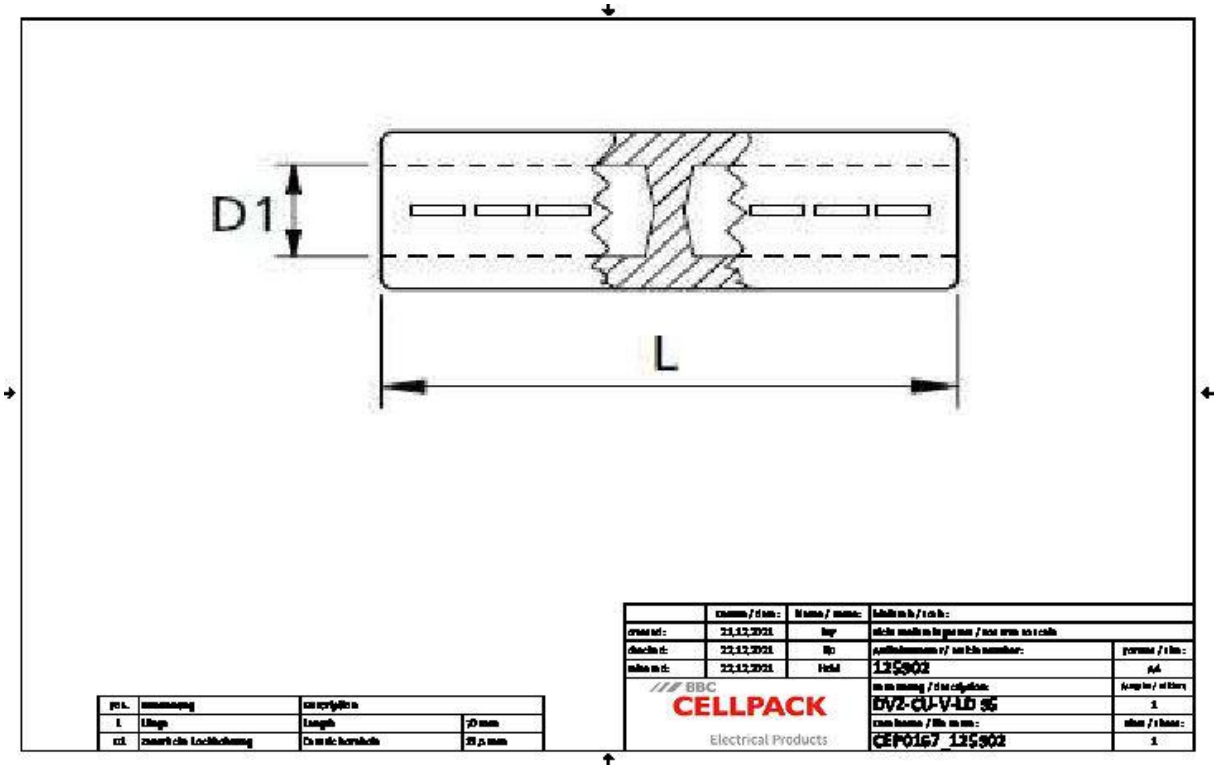

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	70 mm
Diameter D1	13.5 mm
Nominal cross section min	95 mm²
Nominal cross section max	95 mm²
Press die code K	18 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311053264			
Base quantity	1	1	50	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	72	72	195	
Width	20	20	145	
Height	20	20	97	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.029	0.029	2.743	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.103	0.103	5.45	
Net weight	0.103	0.103	5.15	
Weight unit	Kilogram	Kilogram	Kilogram	