Technical-Data-Sheet

DVZ-CU-V-LD

Compression connector Cu

according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed) with a separator for copper conductors, suitable for joints.




Product description

Article name	DVZ-CU-V-LD 150
Material number	125904
Applications	Especially for transition joints and pot end joints
	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

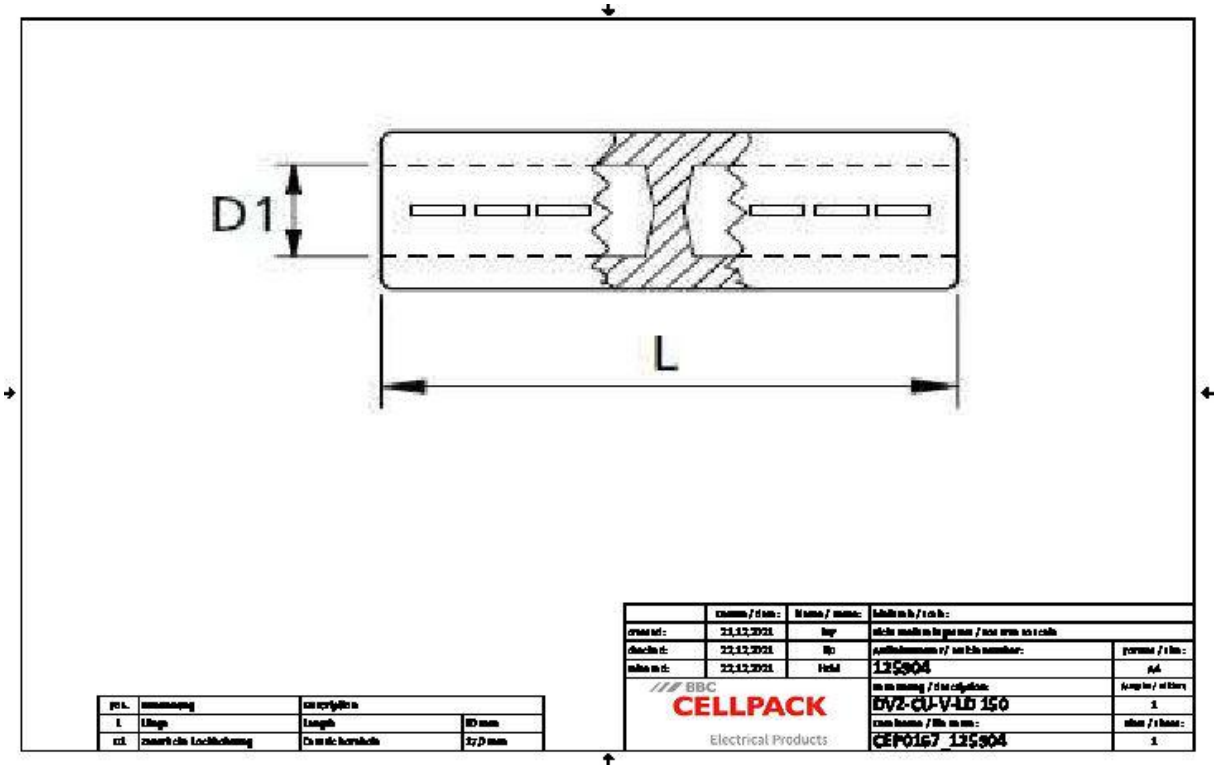

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	80 mm
Diameter D1	17 mm
Nominal cross section min	150 mm²
Nominal cross section max	150 mm²
Press die code K	22 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311053288			
Base quantity	1	1	50	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	82	82	200	
Width	22	22	150	
Height	22	22	100	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.04	0.04	3	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.171	0.171	8.85	
Net weight	0.171	0.171	8.55	
Weight unit	Kilogram	Kilogram	Kilogram	