Technical-Data-Sheet

DVZ-CU-V-LD

Compression connector Cu

according to DIN 46267 with separator for low voltage


Strain-relieving connector (hexagonally compressed) with a separator for copper conductors, suitable for joints.



Product description

Article name	DVZ-CU-V-LD 240
Material number	125906
Applications	Especially for transition joints and pot end joints
	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical data

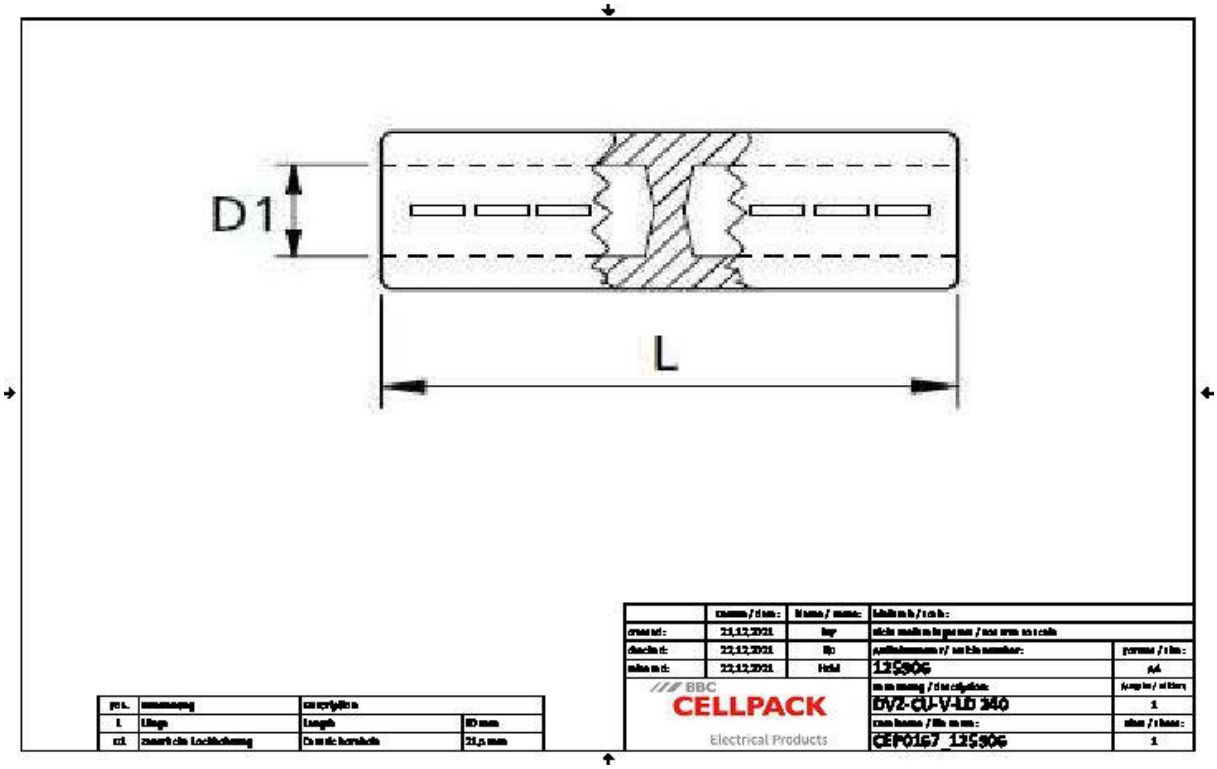

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	90 mm
Diameter D1	21.5 mm
Nominal cross section min	240 mm²
Nominal cross section max	240 mm²
Press die code K	28 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Slovakia
Customs tariff number	85369010

EAN-UPC	4010311053301			
Base quantity	1	1	5	45
Base unit of measure	Piece	Piece	Piece	Piece
Alternate quantity	1	1	1	1
Alternative unit of measure	Piece	Bag1	Case	Carton
Lenght	87	87	136	280
Width	28	28	82	180
Height	28	28	60	160
Dimension unit	Millimetres	Millimetres	Millimetres	Millimetres
Volume	0.068	0.068	0.669	8.064
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	Cubic decimetres
Gross weight	0.242	0.242	1.51	11.19
Net weight	0.242	0.242	1.21	10.89
Weight unit	Kilogram	Kilogram	Kilogram	Kilogram