Technical-Data-Sheet

DV-CU-V

Compression connector Cu

according to DIN 46267 without separator for low voltage

Strain-relieving connector (hexagonally compressed)
for copper conductors, suitable for joints.




Product description

Article name	DV-CU-V 16
Material number	125951
Applications	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

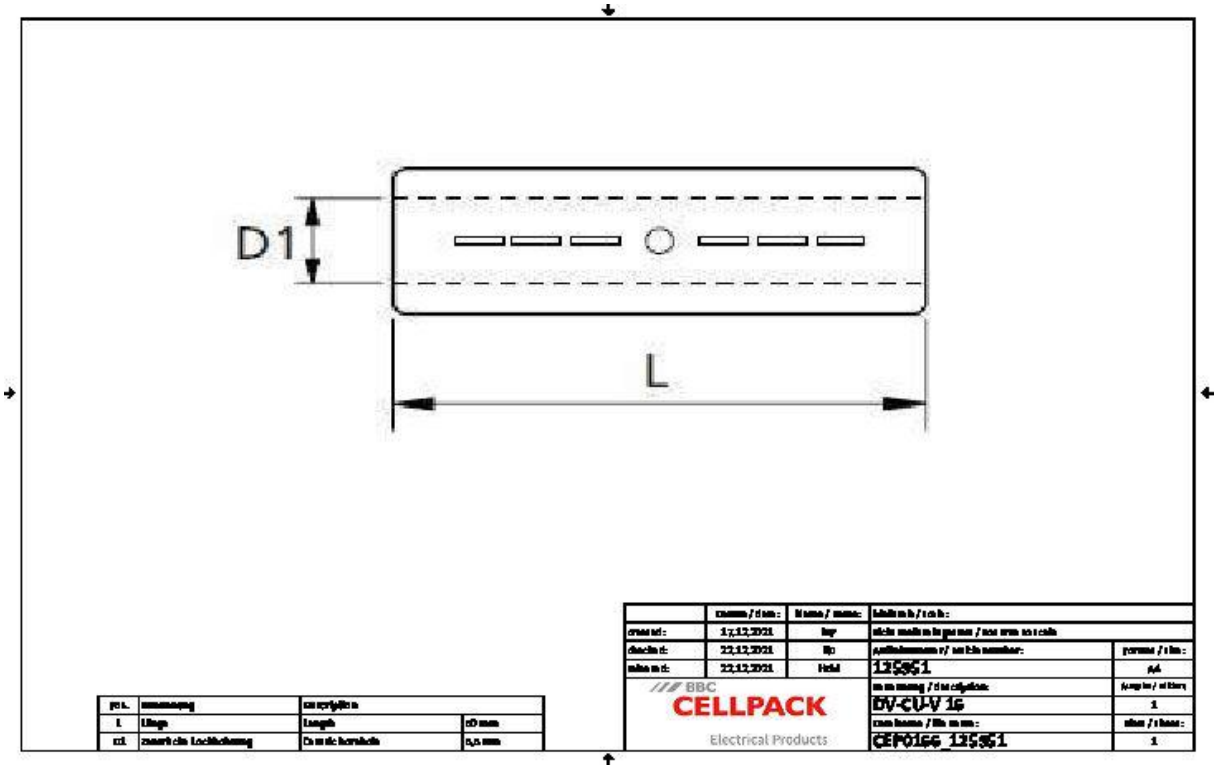

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	50 mm
Diameter D1	5.5 mm
Nominal cross section min	16 mm²
Nominal cross section max	16 mm²
Press die code K	8 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311053035			
Base quantity	1	1	100	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	47	47	100	
Width	7	7	100	
Height	7	7	100	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.002	0.002	1	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.015	0.015	1.8	
Net weight	0.015	0.015	1.5	
Weight unit	Kilogram	Kilogram	Kilogram	