Technical-Data-Sheet

DV-CU-V

Compression connector Cu

according to DIN 46267 without separator for low voltage


Strain-relieving connector (hexagonally compressed)
for copper conductors, suitable for joints.



Product description

Article name	DV-CU-V 25
Material number	125952
Applications	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical data

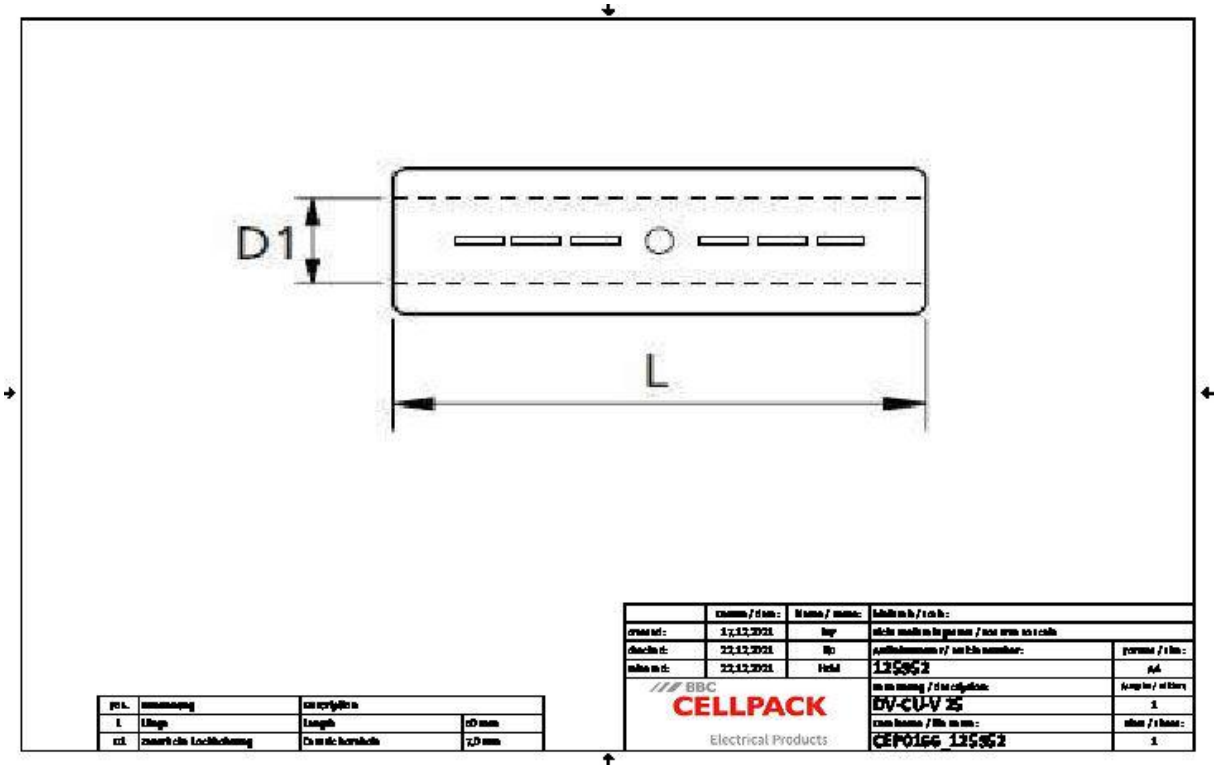

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	50 mm
Diameter D1	7 mm
Nominal cross section min	25 mm²
Nominal cross section max	25 mm²
Press die code K	10 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311053042			
Base quantity	1	1	100	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	50	50	97	
Width	7	7	97	
Height	7	7	97	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.002	0.002	0.913	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.017	0.017	2	
Net weight	0.017	0.017	1.7	
Weight unit	Kilogram	Kilogram	Kilogram	