DV-CU-V

Compression connector Cu

according to DIN 46267 without separator for low voltage


Strain-relieving connector (hexagonally compressed)
for copper conductors, suitable for joints.



Product description

Article name	DV-CU-V 400
Material number	125962
Applications	Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical data

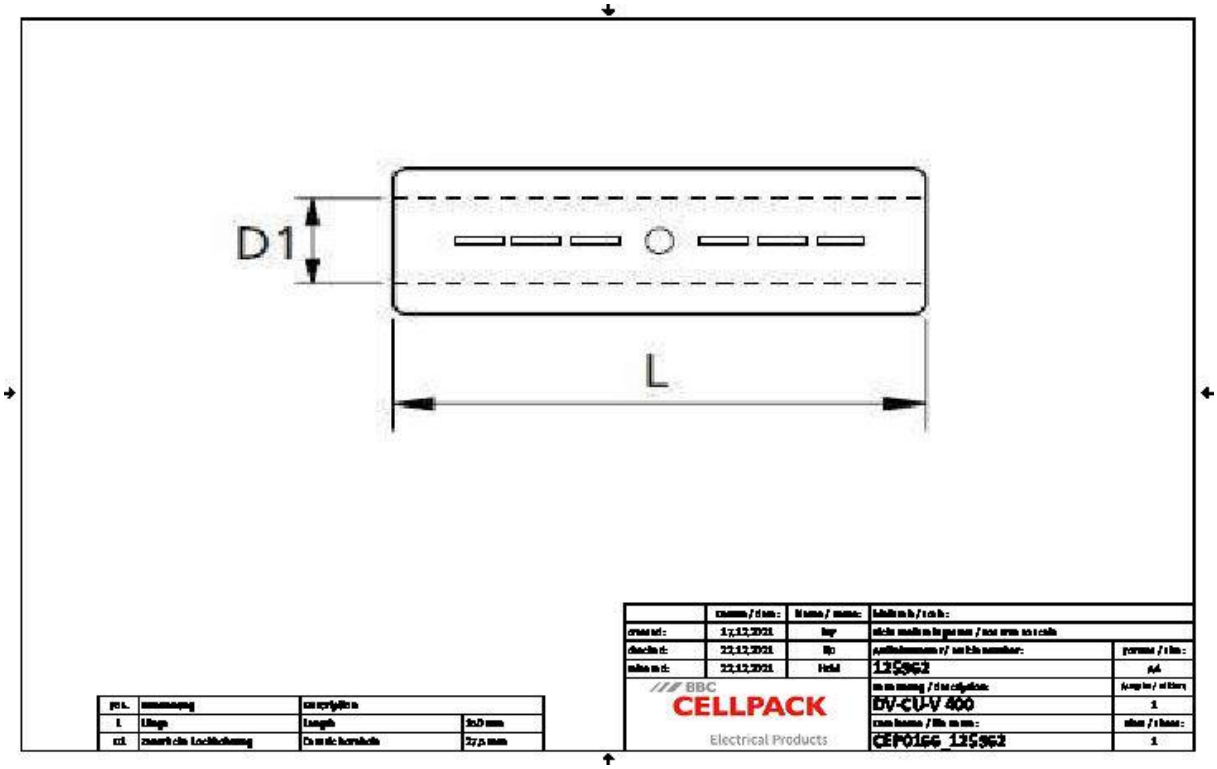

Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	150 mm
Diameter D1	27.5 mm
Nominal cross section min	400 mm²
Nominal cross section max	400 mm²
Press die code K	38 mm

Logistics data

Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311053141			
Base quantity	1	1	50	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	147	147	290	
Width	37	37	205	
Height	37	37	155	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.201	0.201	9.215	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.761	0.761	38.35	
Net weight	0.761	0.761	38.05	
Weight unit	Kilogram	Kilogram	Kilogram	