DK-CU-V

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 6/6
Material number	126040
Applications	Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

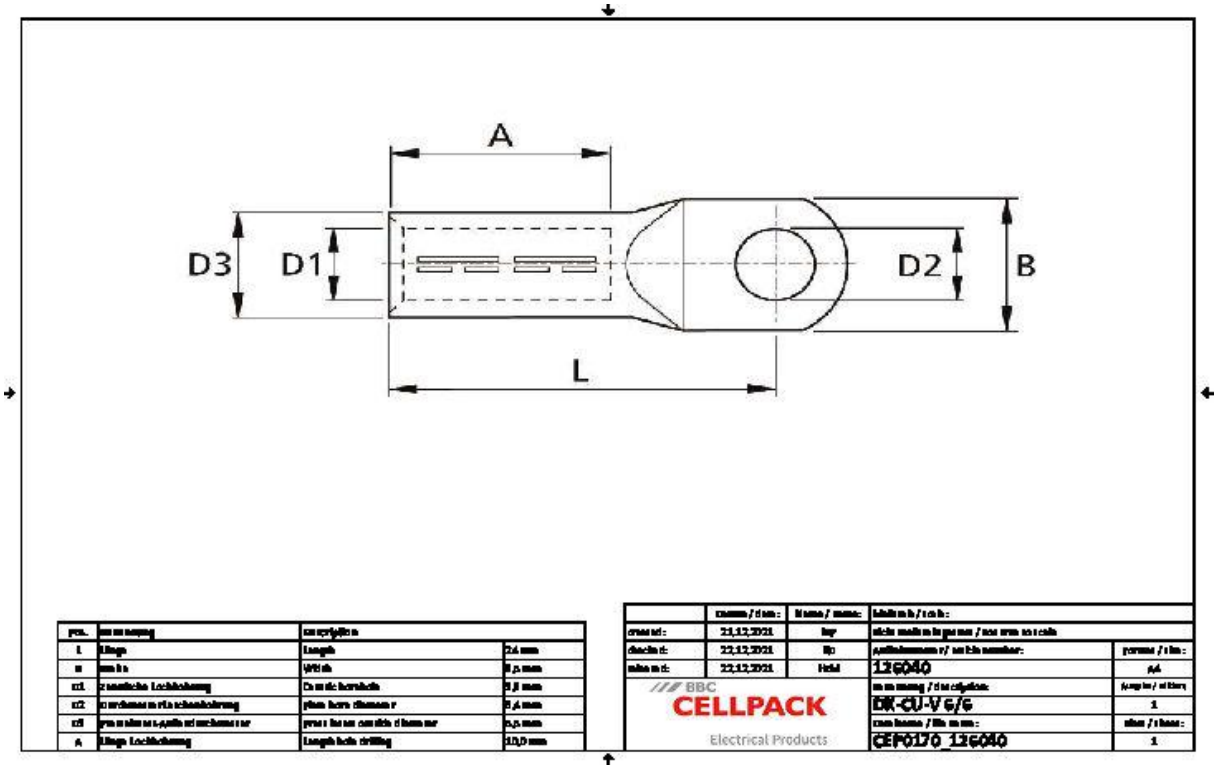

Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	24 mm
Width B	8.5 mm
Diameter D1	3.8 mm
Diameter D2	6.4 mm
Diameter D3	5.5 mm
Nominal cross section min	6 mm²
Press die code K	5 mm
Length A	10 mm

Logistics data

Delivery scope	Compression cable lug
Country of origin	Germany
Customs tariff number	85369010

EAN-UPC	4010311052397			
Base quantity	1	1	100	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	33	33	83	
Width	4	4	68	
Height	2	2	58	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0	0	0.327	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.003	0.003	0.6	
Net weight	0.003	0.003	0.3	
Weight unit	Kilogram	Kilogram	Kilogram	