Technical-Data-Sheet

DK-CU-V

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 16/8
Material number	126046
Applications	Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

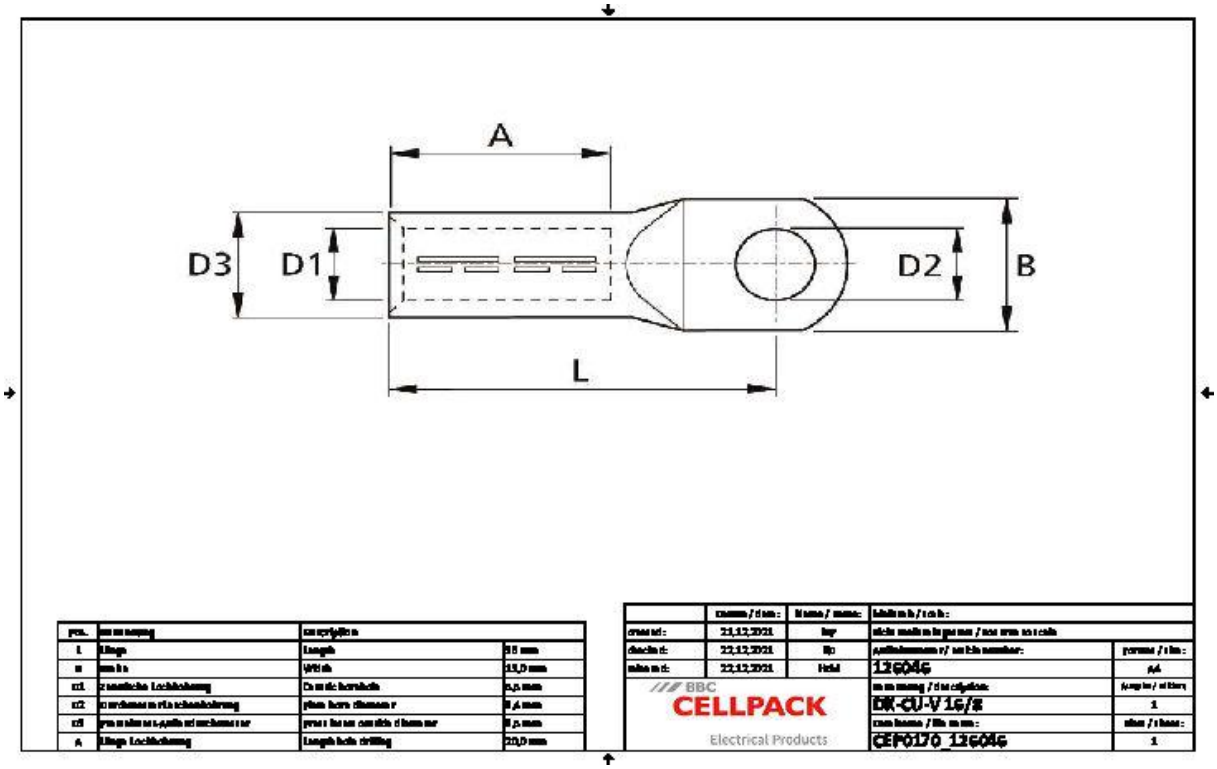

Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	36 mm
Width B	13 mm
Diameter D1	5.5 mm
Diameter D2	8.4 mm
Diameter D3	8.5 mm
Nominal cross section min	16 mm²
Press die code K	8 mm
Length A	20 mm

Logistics data

Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311052410			
Base quantity	1	1	100	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	49	49	97	
Width	12	12	97	
Height	7	7	97	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.004	0.004	0.913	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.013	0.013	1.6	
Net weight	0.013	0.013	1.3	
Weight unit	Kilogram	Kilogram	Kilogram	