# Technical-Data-Sheet

## DK-CU-V

## Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




### Product description

| | |
|---|---|
| Article name | DK-CU-V 50/10 |
| Material number | 126059 |
| Applications | Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295) |
| Family notes | To be used with suitable crimping tool with DIN inserts |

# Technical-Data-Sheet

## Technical data

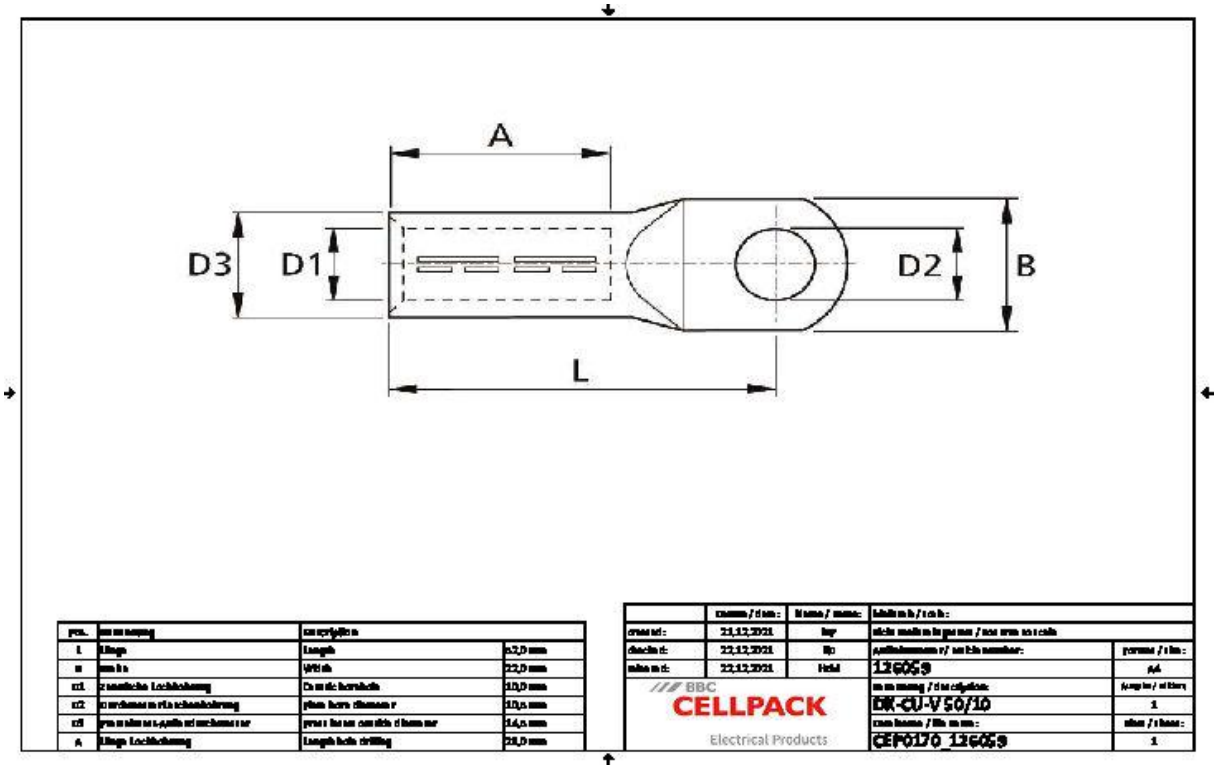


| | |
|---|---|
| Test standards | DIN 46235 |
| | IEC 61238 |
| Materials | Copper tin-plated |
| Length L | 52 mm |
| Width B | 22 mm |
| Diameter D1 | 10 mm |
| Diameter D2 | 10.5 mm |
| Diameter D3 | 14.5 mm |
| Nominal cross section min | 50 mm² |
| Press die code K | 14 mm |
| Length A | 28 mm |

## Logistics data

| | |
|---|---|
| Delivery scope | Compression cable lug |
| Country of origin | Poland |
| Customs tariff number | 85369010 |

| | | | | |
|---|---|---|---|---|
| EAN-UPC | 4010311052472 | | | |
| Base quantity | 1 | 1 | 100 | |
| Base unit of measure | Piece | Piece | Piece | |
| Alternate quantity | 1 | 1 | 1 | |
| Alternative unit of measure | Piece | Bag1 | Carton | |
| Lenght | 67 | 67 | 145 | |
| Width | 20 | 20 | 145 | |
| Height | 12 | 12 | 97 | |
| Dimension unit | Millimetres | Millimetres | Millimetres | |
| Volume | 0.016 | 0.016 | 2.039 | |
| Volume unit | Cubic decimetres | Cubic decimetres | Cubic decimetres | |
| Gross weight | 0.047 | 0.047 | 5 | |
| Net weight | 0.047 | 0.047 | 4.7 | |
| Weight unit | Kilogram | Kilogram | Kilogram | |