Technical-Data-Sheet

DK-CU-V

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 240/12
Material number	126089
Applications	Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

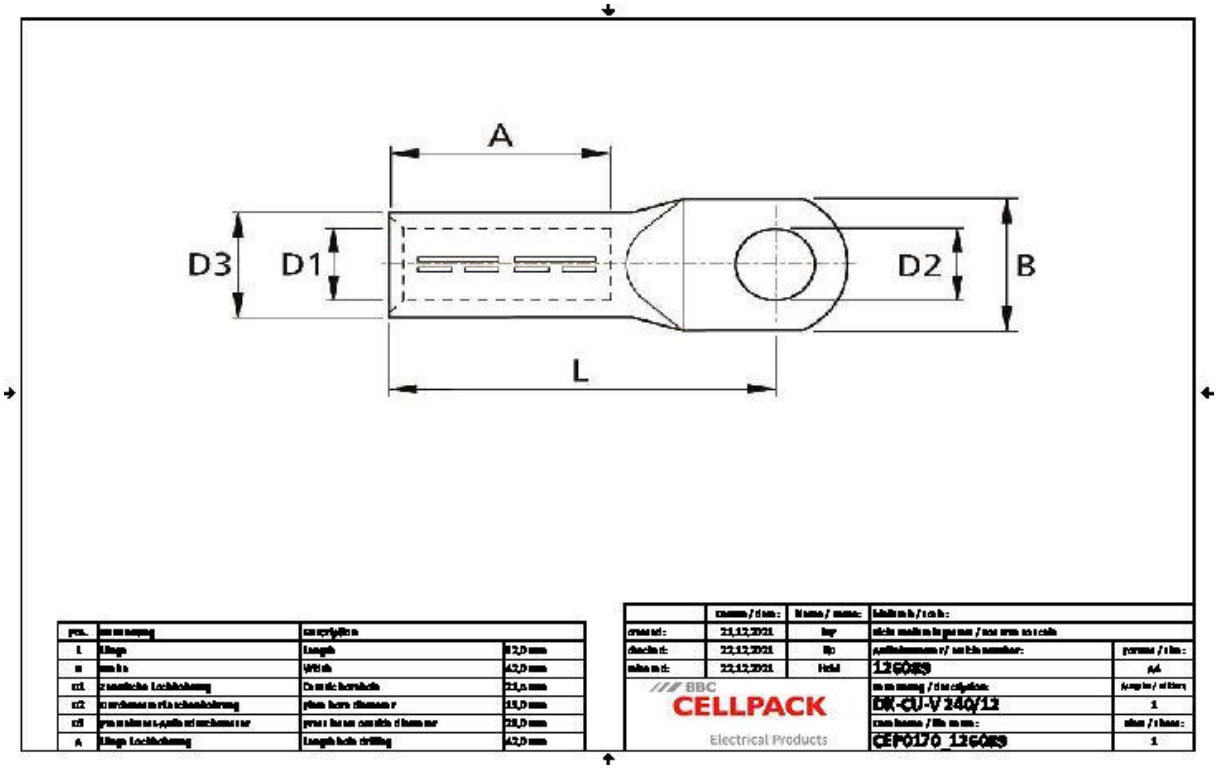

Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	92 mm
Width B	42 mm
Diameter D1	21.5 mm
Diameter D2	13 mm
Diameter D3	29 mm
Nominal cross section min	240 mm²
Press die code K	28 mm
Length A	42 mm

Logistics data

Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311052601			
Base quantity	1	1	50	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	107	107	195	
Width	42	42	145	
Height	27	27	145	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.121	0.121	4.1	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.269	0.269	13.75	
Net weight	0.269	0.269	13.45	
Weight unit	Kilogram	Kilogram	Kilogram	