# Technical-Data-Sheet

## DK-CU-V

### Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




## Product description

| | |
|---|---|
| Article name | DK-CU-V 240/16 |
| Material number | 126091 |
| Applications | Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295) |
| Family notes | To be used with suitable crimping tool with DIN inserts |

# Technical-Data-Sheet

## Technical data

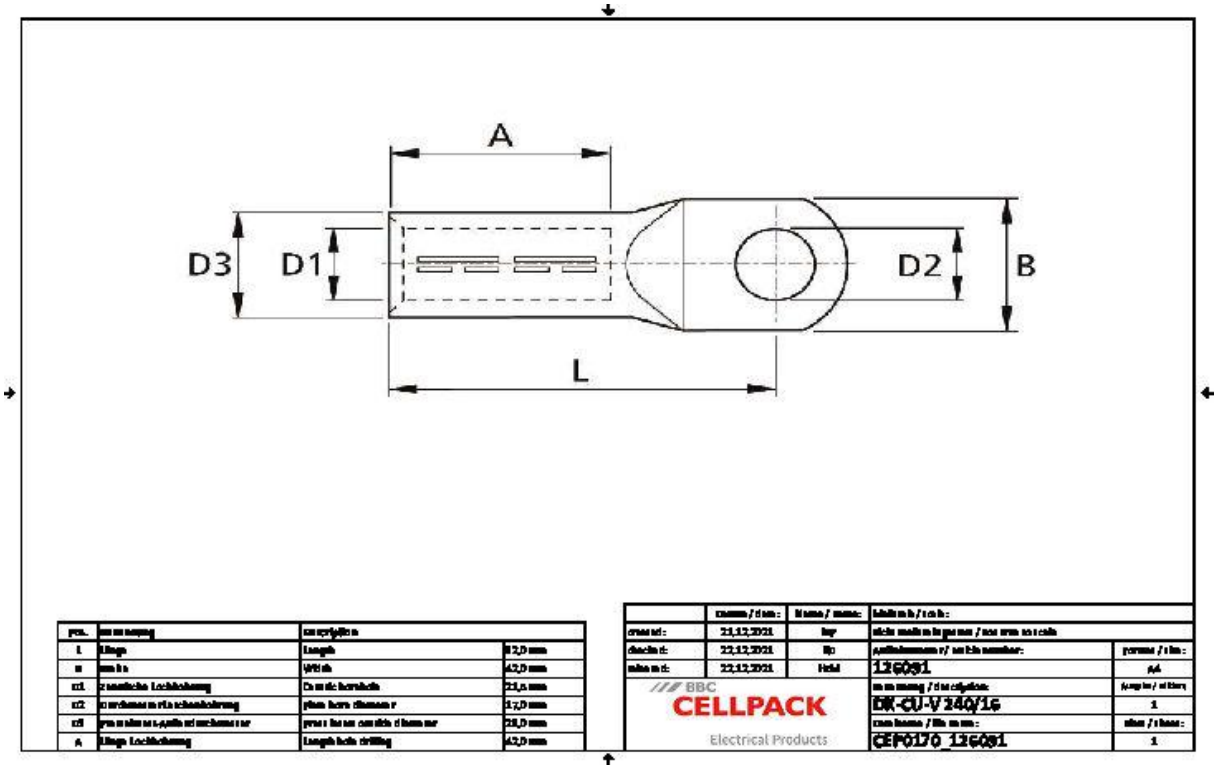


| | |
|---|---|
| Test standards | DIN 46235 |
| | IEC 61238 |
| Materials | Copper tin-plated |
| Length L | 92 mm |
| Width B | 42 mm |
| Diameter D1 | 21.5 mm |
| Diameter D2 | 17 mm |
| Diameter D3 | 29 mm |
| Nominal cross section min | 240 mm² |
| Press die code K | 28 mm |
| Length A | 42 mm |

## Logistics data

| | |
|---|---|
| Delivery scope | Compression cable lug |
| Country of origin | Poland |
| Customs tariff number | 85369010 |

| | | | | |
|---|---|---|---|---|
| EAN-UPC | 4010311052618 | | | |
| Base quantity | 1 | 1 | 50 | |
| Base unit of measure | Piece | Piece | Piece | |
| Alternate quantity | 1 | 1 | 1 | |
| Alternative unit of measure | Piece | Bag1 | Carton | |
| Lenght | 109 | 109 | 290 | |
| Width | 39 | 39 | 195 | |
| Height | 27 | 27 | 145 | |
| Dimension unit | Millimetres | Millimetres | Millimetres | |
| Volume | 0.115 | 0.115 | 8.2 | |
| Volume unit | Cubic decimetres | Cubic decimetres | Cubic decimetres | |
| Gross weight | 0.263 | 0.263 | 13.45 | |
| Net weight | 0.263 | 0.263 | 13.15 | |
| Weight unit | Kilogram | Kilogram | Kilogram | |