Technical-Data-Sheet

DK-CU-V

Compression cable lug Cu

for low and medium voltage


Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.



Product description

Article name	DK-CU-V 300/14
Material number	126093
Applications	Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical data

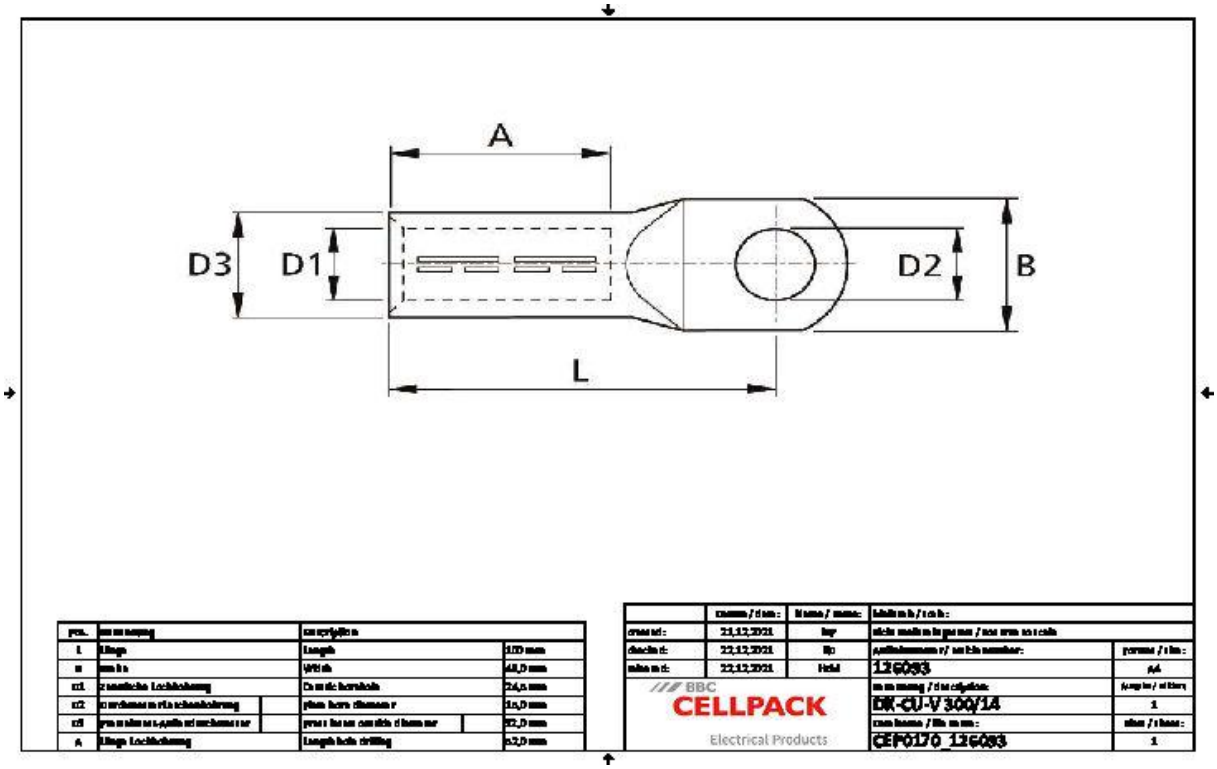

Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	100 mm
Width B	48 mm
Diameter D1	24.5 mm
Diameter D2	15 mm
Diameter D3	32 mm
Nominal cross section min	300 mm²
Press die code K	32 mm
Length A	52 mm

Logistics data

Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010

EAN-UPC	4010311052625			
Base quantity	1	1	25	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	118	118	195	
Width	41	41	145	
Height	30	30	145	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.145	0.145	4.1	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.326	0.326	8.45	
Net weight	0.326	0.326	8.15	
Weight unit	Kilogram	Kilogram	Kilogram	