Technical-Data-Sheet

DK-CU-V

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 625/16
Material number	126099
Applications	Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)
Family notes	To be used with suitable crimping tool with DIN inserts

Technical-Data-Sheet

Technical data

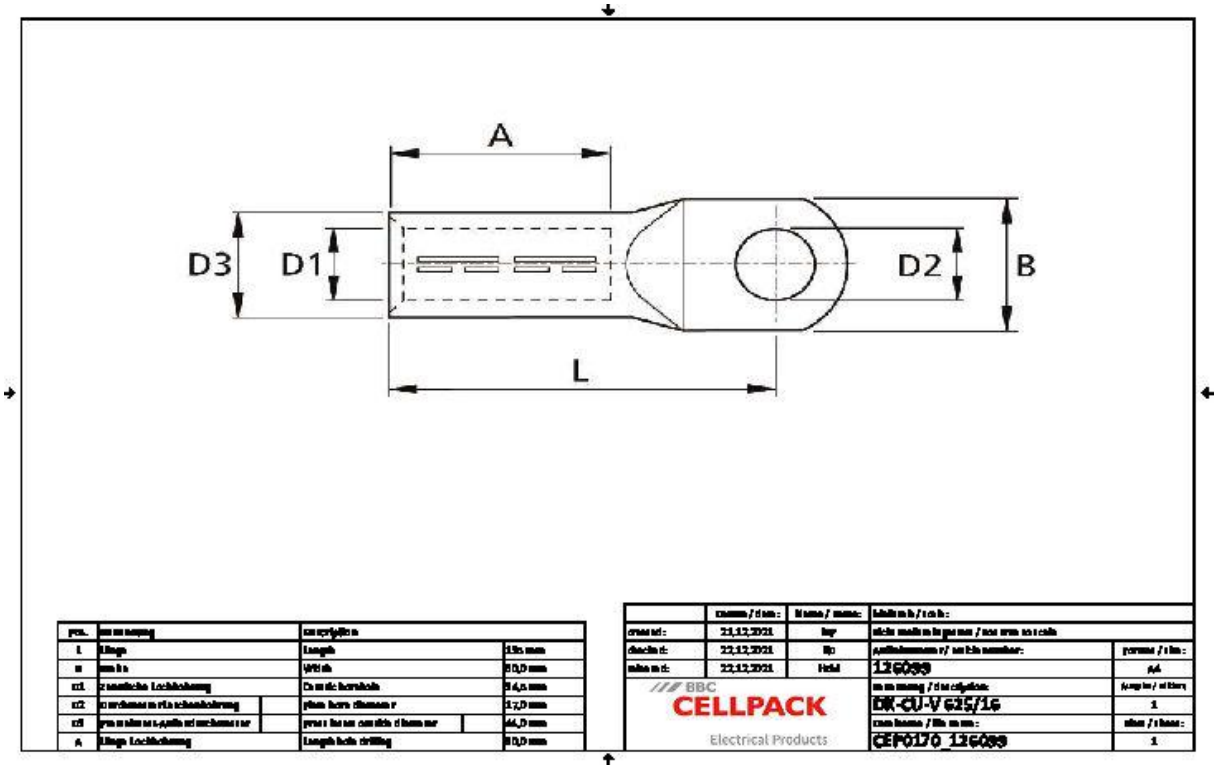

Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	135 mm
Width B	60 mm
Diameter D1	34.5 mm
Diameter D2	17 mm
Diameter D3	44 mm
Nominal cross section min	625 mm²
Press die code K	44 mm
Length A	80 mm

Logistics data

Delivery scope	Compression cable lug
Country of origin	Slovakia
Customs tariff number	85369010

EAN-UPC	4010311052663			
Base quantity	1	1		
Base unit of measure	Piece	Piece		
Alternate quantity	1	1		
Alternative unit of measure	Piece	Carton		
Lenght	165	165		
Width	135	135		
Height	75	75		
Dimension unit	Millimetres	Millimetres		
Volume	1.671	1.671		
Volume unit	Cubic decimetres	Cubic decimetres		
Gross weight	0.8	0.8		
Net weight	0.8	0.8		
Weight unit	Kilogram	Kilogram		