SMHC…

Heat shrinkable straight-through joint

for polymeric cables with concentric conductor


Universally suitable for connecting polymeric-insulated cables and conductors with concentric conductors and insulations made of PVC, PE and XLPE (e.g. N(A)YCY, N(A)YC(W)Y, GKN). Suitable for compression connectors.



Product description

Article name	SMHC3 16-35
Material number	126674
Characteristics	Compact dimensions
	Wide conductor and cross-section range
	Resistant to chemical agents
	Resistant to alkaline earth elements
	Stabilized against UV rays
	Free from paint-wetting inhibiting substances
	Halogen-free
	Transversely waterproof
	High electrical insulating values
	High mechanical strength
Applications	Indoor
	Outdoor
	Underground
	Water
	Installation ducts
	Ductwork
Article notes	With additional inner tube
Optional accessory	Compression connectors (see Connecting technology)

Technical data

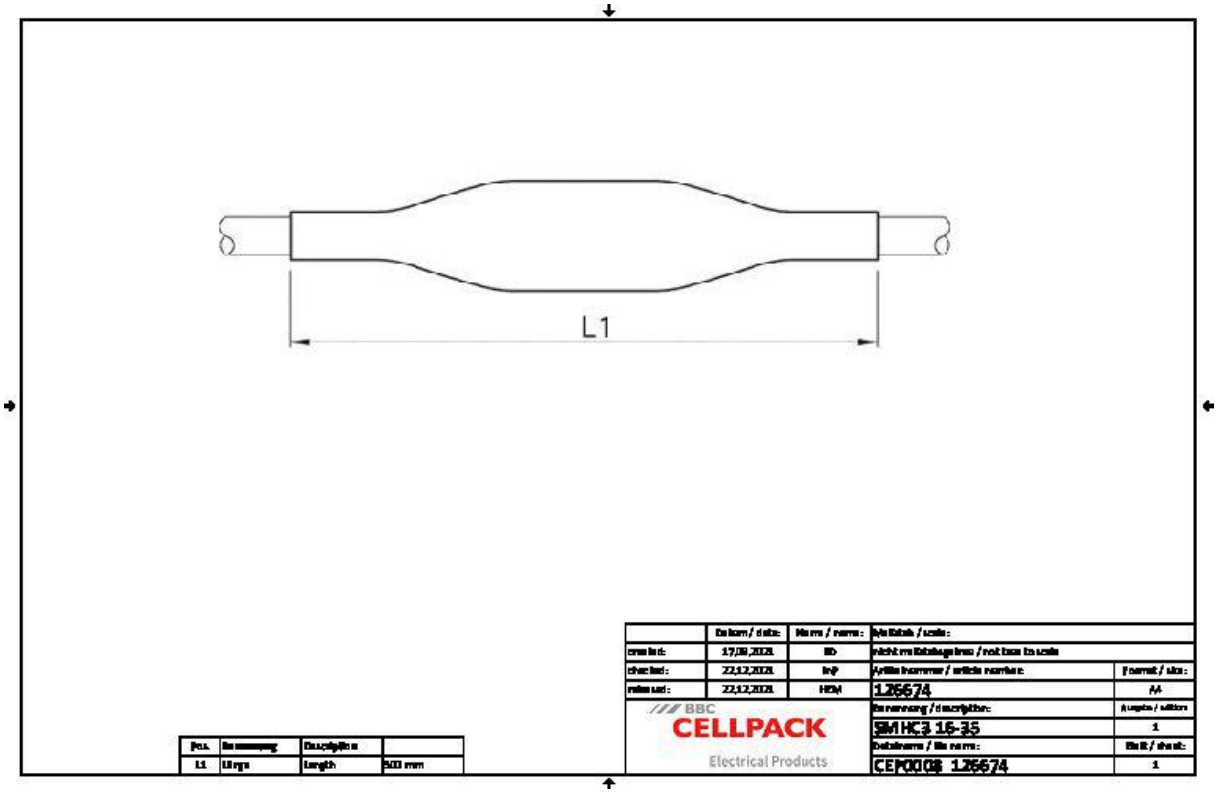

Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Article notes	With additional inner tube
Length L1	500 mm
Nominal cross section Polymeric cable with concentric conductor per conductor 3x min	16 mm²
Nominal cross section Polymeric cable with concentric conductor per conductor 3x max	35 mm²

Logistics data

Delivery scope	Outer sleeve
	Inner sleeves
	Copper braid tape
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900

EAN-UPC	4010311048345			
Base quantity	1	1	50	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	558	558	815	
Width	223	223	610	
Height	85	85	360	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	10.577	10.577	178.974	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.443	0.443	22.45	
Net weight	0.443	0.443	22.15	
Weight unit	Kilogram	Kilogram	Kilogram	