Technical-Data-Sheet

SMH1…5

Heat shrinkable straight-through joint

for unarmoured polymeric cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH4 16-50
Material number	145320
Characteristics	Compact dimensions
	Wide conductor and cross-section range
	Resistant to chemical agents
	Resistant to alkaline earth elements
	Stabilized against UV rays
	Free from paint-wetting inhibiting substances
	Halogen-free
	Transversely waterproof
	High electrical insulating values
	High mechanical strength
Applications	Indoor
	Outdoor
	Underground
	Water
	Installation ducts
	Ductwork
Optional accessory	Compression connectors (see Connecting technology)

Technical-Data-Sheet

Technical data

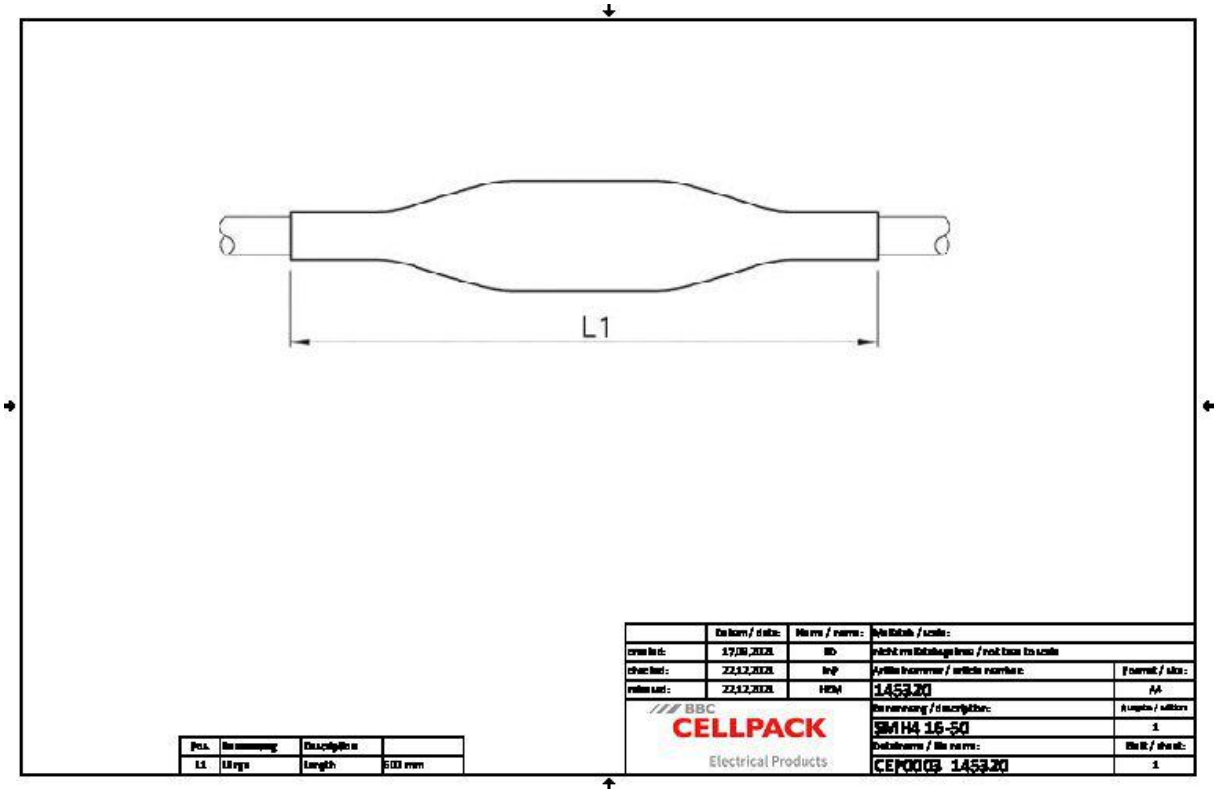

Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	600 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	16 mm²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	50 mm²

Logistics data

Delivery scope	Outer sleeve
	Inner sleeves
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900

EAN-UPC	4010311000275			
Base quantity	1	1	5	210
Base unit of measure	Piece	Piece	Piece	Piece
Alternate quantity	1	1	1	1
Alternative unit of measure	Piece	Bag1	Carton	Pal. OW
Lenght	630	630	730	1200
Width	124	124	165	800
Height	57	57	149	1100
Dimension unit	Millimetres	Millimetres	Millimetres	Millimetres
Volume	4.453	4.453	17.947	1056
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	Cubic decimetres
Gross weight	0.261	0.261	1.605	73.01
Net weight	0.261	0.261	1.305	54.81
Weight unit	Kilogram	Kilogram	Kilogram	Kilogram