SMH…V

Heat shrinkable straight-through joint

with screw connectors for unarmoured polymeric cables and conductors


Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). With screw connectors with grub screw,suitable for aluminium and copper conductors.



Product description

Article name	SMH5 6-35 V
Material number	145363
Characteristics	Compact dimensions
	Wide conductor and cross-section range
	Resistant to chemical agents
	Resistant to alkaline earth elements
	Stabilized against UV rays
	Free from paint-wetting inhibiting substances
	Halogen-free
	Transversely waterproof
	High electrical insulating values
	High mechanical strength
Applications	Indoor
	Outdoor
	Underground
	Water
	Installation ducts
	Ductwork

Technical data

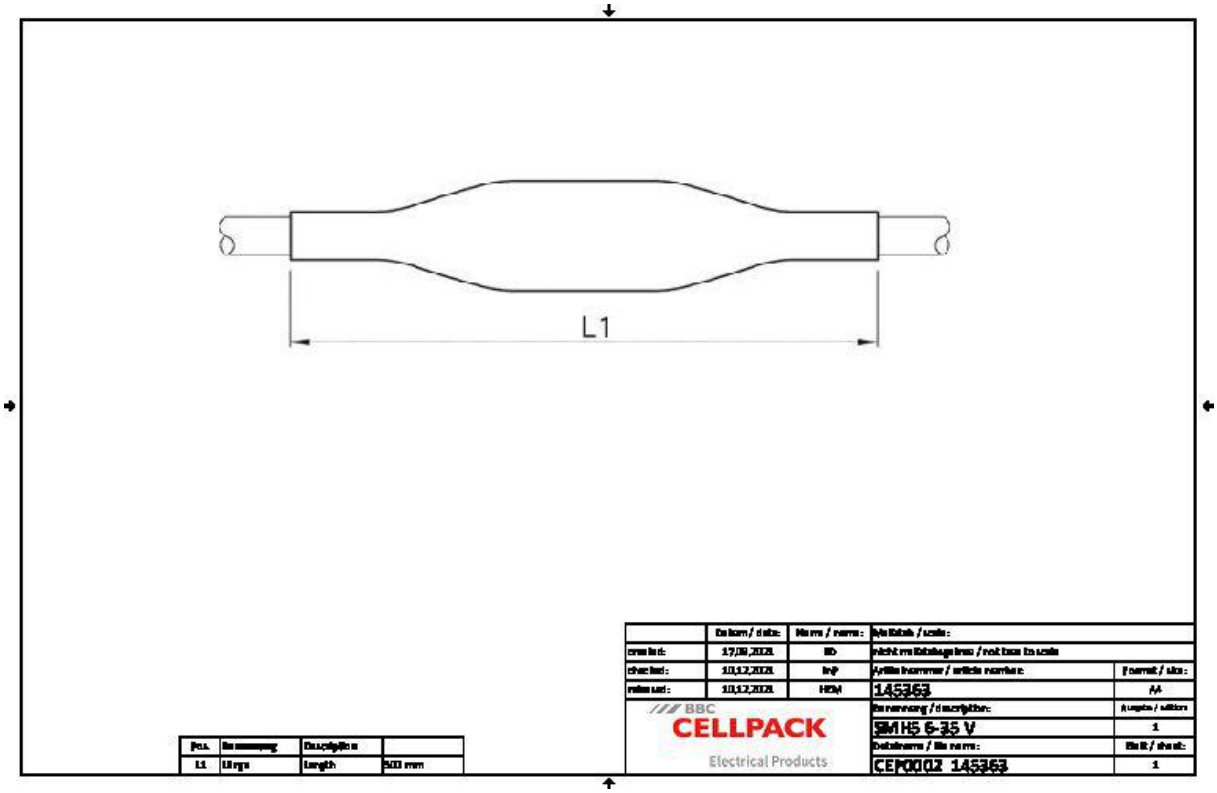

Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	500 mm
Nominal cross section Polymeric cable unarmoured per conductor 5x min	6 mm²
Nominal cross section Polymeric cable unarmoured per conductor 5x max	35 mm²

Logistics data

Delivery scope	Outer sleeve
	Inner sleeves
	Screw connector
	Allen key
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900

EAN-UPC	4010311020617			
Base quantity	1	1	5	210
Base unit of measure	Piece	Piece	Piece	Piece
Alternate quantity	1	1	1	1
Alternative unit of measure	Piece	Bag1	Carton	Pal. OW
Lenght	500	500	620	1200
Width	170	170	170	800
Height	157	157	170	1130
Dimension unit	Millimetres	Millimetres	Millimetres	Millimetres
Volume	13.345	13.345	17.918	1084.8
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	Cubic decimetres
Gross weight	0.395	0.395	1.979	101.15
Net weight	0.395	0.395	1.975	82.95
Weight unit	Kilogram	Kilogram	Kilogram	Kilogram