Technical-Data-Sheet

SMH…G

Heat shrinkable straight-through joint

for flexible cables


Universally suitable for connecting conductors insulated with EPR (e.g. A07RN-F, H07RN-F). Suitable for compression connectors.



Product description

Article name	SMH5G 1.5-10
Material number	145483
Characteristics	Compact dimensions
	Wide conductor and cross-section range
	Resistant to chemical agents
	Resistant to alkaline earth elements
	Stabilized against UV rays
	Free from paint-wetting inhibiting substances
	Halogen-free
	Transversely waterproof
	High electrical insulating values
	High mechanical strength
Applications	Indoor
	Outdoor
	Underground
	Water
	Installation ducts
	Ductwork

Technical data

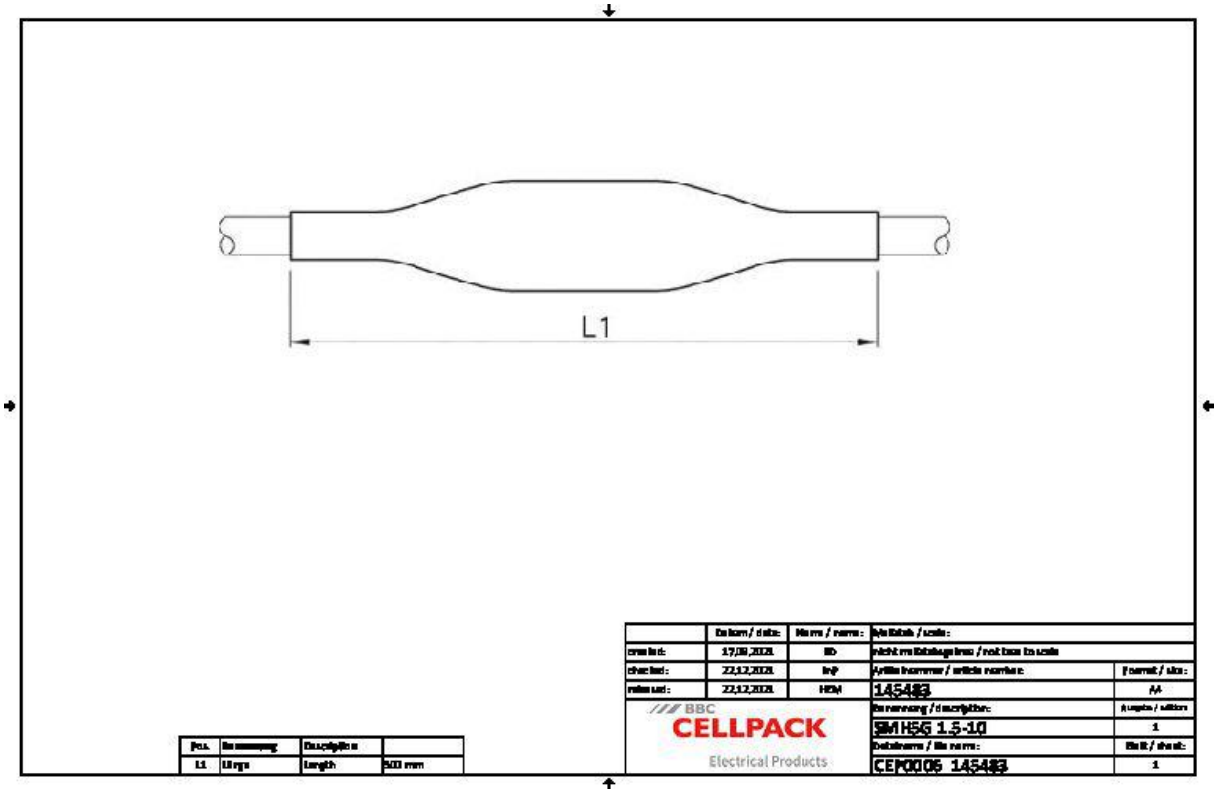

Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	500 mm
Nominal cross section Polymeric cable unarmoured per conductor 5x min	1.5 mm²
Nominal cross section Polymeric cable unarmoured per conductor 5x max	10 mm²

Logistics data

Delivery scope	Outer sleeve
	Inner sleeves
	Filling material
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900

EAN-UPC	4010311004266			
Base quantity	1	1	50	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	524	524	585	
Width	116	116	395	
Height	57	57	495	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	3.465	3.465	114.382	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.169	0.169	8.75	
Net weight	0.169	0.169	8.45	
Weight unit	Kilogram	Kilogram	Kilogram	