
DUCT SEAL

Universal sealing compound

based on butyl rubber

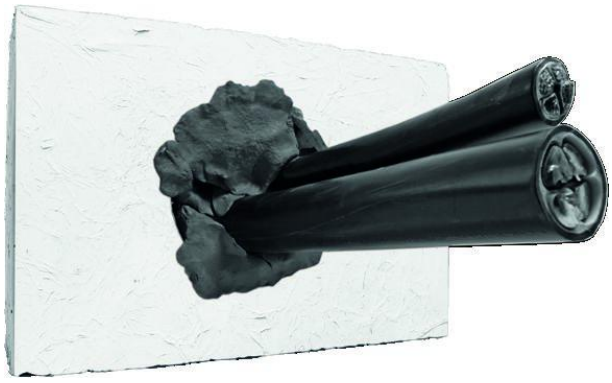

Product description

Article name	DUCT SEAL 0.454 kg
Material number	240358
Characteristics	Firm consistency, good shape retention, can be easily moulded
	Excellent adhesion to almost all materials (metal, concrete, stone, wood, glass, ceramic, enamel etc.)
	Plastic viscosity
	Superior ageing resistance
	High resistance to many gases
	High resistance to many condensates
	Stabilized against UV rays
	Halogen-free
	Not harmful to the environment
	High water resistance
	Easy processing
Applications	Sealing of wall ducts, cable ducts, electrical devices, drains and sanitary installations
Optional accessory	Cleaner UNIVERSAL CLEANER 121 (see Accessories)

Technical data

Content	454 g
Colours	grey
Density	1 g/cm³
Operation temperature min	40 °C
Operation temperature max	100 °C
Short-term heat resistance	120 °C

Logistics data

Delivery scope	Universal sealing compound
Country of origin	Germany
Customs tariff number	40059100

EAN-UPC	4010311127972			
Base quantity	1	1	10	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	178	178	320	
Width	106	106	320	
Height	47	47	190	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.887	0.887	19.456	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.509	0.509	5.39	
Net weight	0.509	0.509	5.09	
Weight unit	Kilogram	Kilogram	Kilogram	