CSV-T

Screw connector for Cu and Al

longitudinally sealed with separator for low voltage

Screw connector for RM/SM/RE/SE aluminium and copper conductors, suitable for straight-through and transition joints.




Product description

Article name	CSV-T 6-50
Material number	255406
Applications	For connecting conductors RM/SM (class 2), RE/SE (class 1) according to DIN EN/IEC 60228 (VDE 0295)
Family notes	BBC Cellpack counter-holder recommended for installation (see Accessories).

Technical-Data-Sheet

Technical data

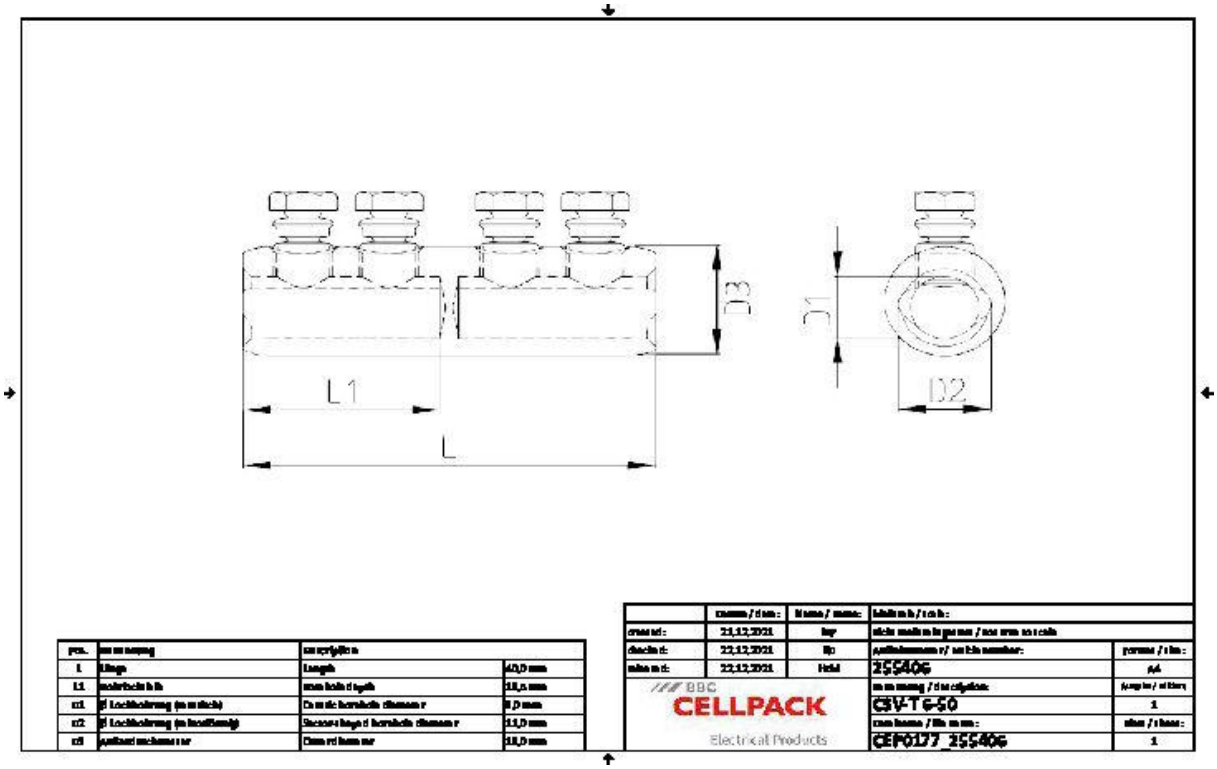

Test standards	IEC 61238-1
Materials	Aluminium tin-plated
Length L	40 mm
Length L1	18.5 mm
Diameter D1	9 mm
Diameter D2	11 mm
Diameter D3	18 mm
Number of bolts	2 Pieces

Logistics data

Delivery scope	Screw connector
	Assembly instructions
Country of origin	Spain
Customs tariff number	85369010

EAN-UPC	4010311137612			
Base quantity	1	1	100	3600
Base unit of measure	Piece	Piece	Piece	Piece
Alternate quantity	1	1	1	1
Alternative unit of measure	Piece	Bag1	Carton	Pal. OW
Lenght	107	107	420	1200
Width	75	75	250	800
Height	17	17	140	1130
Dimension unit	Millimetres	Millimetres	Millimetres	Millimetres
Volume	0.136	0.136	14.7	1084.8
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	Cubic decimetres
Gross weight	0.029	0.029	3.2	122.6
Net weight	0.029	0.029	2.9	104.4
Weight unit	Kilogram	Kilogram	Kilogram	Kilogram