Technical-Data-Sheet

T...GG

Cast resin branch joint

for polymeric cables

Universally suitable for branching polymeric cables or conductors insulated with PVC, PE, XLPE and EPR (e.g. N(A)YY, NYM, TT) with or without concentric conductor. Suitable for branch clamps on copper and aluminium conductors




Product description

Article name	T 4 GG
Material number	353860
Characteristics	Compact dimensions
	High-quality transparent shockproof plastic shell
	Resistant to chemical agents
	Stabilized against UV rays
	Resistant to alkaline earth elements
	Longitudinally and transversely watertight
	High electrical insulating values
	High mechanical strength
	Ready for immediate operation
	Quick, safe and easy assembly
	Large filler aperture to facilitate casting
Applications	Indoor
	Outdoor
	Underground
	Water
	Installation ducts
Optional accessory	Screw branch clamp AK (see Connecting technology)
	Cleaner UNIVERSAL CLEANER 121 (see Accessories)
	Branch clamp KP (see Connecting technology)
	Split bolt clamp FK (see Connecting technology)

Technical-Data-Sheet

Technical data

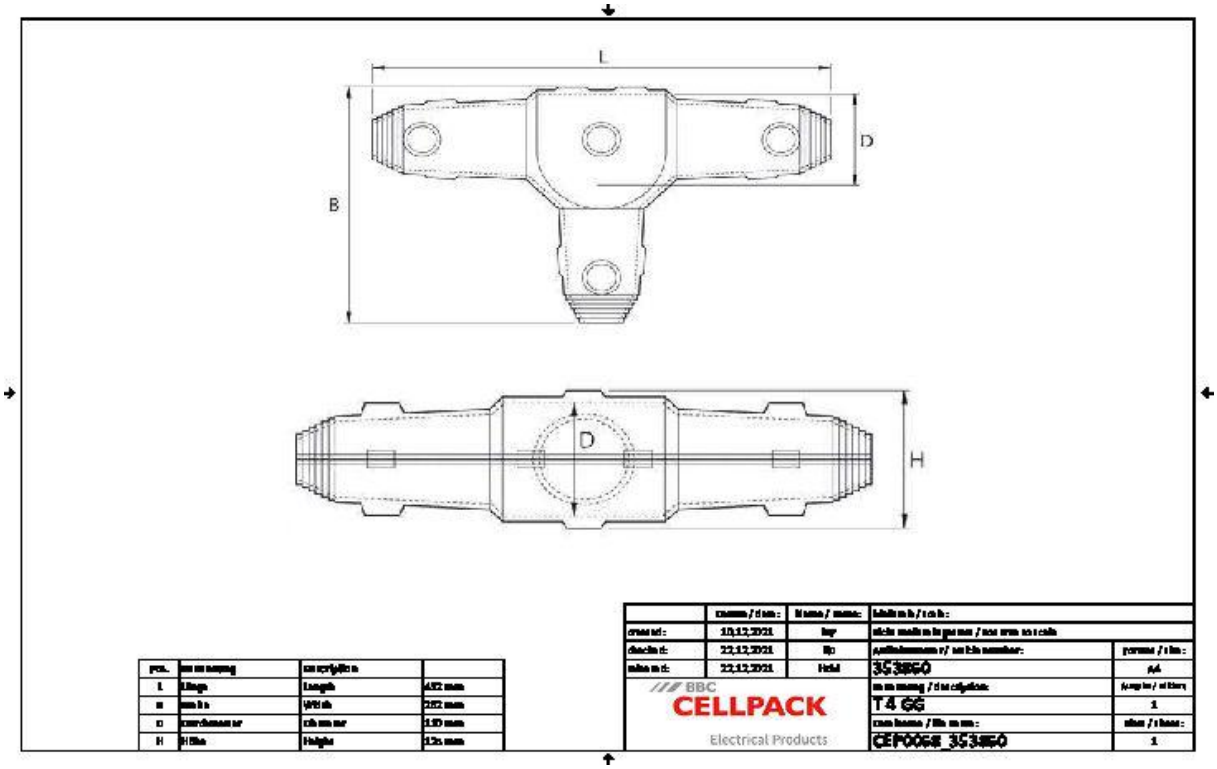

Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	432 mm
Width B	262 mm
Heigth H	125 mm
Diameter D	110 mm
Nominal cross section Main cable Polymeric cable unarmoured per conductor 3x max	120 mm²
Nominal cross section Branch cable Polymeric cable unarmoured per conductor 3x max	120 mm²
Nominal cross section Main cable Polymeric cable unarmoured per conductor 4x max	95 mm²
Nominal cross section Branch cable Polymeric cable unarmoured per conductor 4x max	50 mm²
Nominal cross section Main cable Polymeric cable unarmoured per conductor 5x max	50 mm²
Nominal cross section Branch cable Polymeric cable unarmoured per conductor 5x max	35 mm²
Nominal cross section Main cable Polymeric cable with concentric conductor per conductor 3x min	95 mm²
Nominal cross section Main cable Polymeric cable with concentric conductor per conductor 3x max	95 mm²
Nominal cross section Branch cable Polymeric cable with concentric conductor per conductor 3x min	50 mm²
Nominal cross section Branch cable Polymeric cable with concentric conductor per conductor 3x max	50 mm²
Nominal cross section Main cable Polymeric cable with concentric conductor per conductor 4x min	95 mm²
Nominal cross section Main cable Polymeric cable with concentric conductor per conductor 4x max	95 mm²
Nominal cross section Branch cable Polymeric cable with concentric conductor per conductor 4x min	70 mm²
Nominal cross section Branch cable Polymeric cable with concentric conductor per conductor 4x max	70 mm²
Diameter cable max	52 mm

Logistics data

Delivery scope	Fill and air-release funnel
	Hydrolysis resistance PUR type GG cast resin
	Packed in practical and easy-to-use two-chamber bags
	Transparent plastic shell
	PVC insulation tape
	Protective gloves
	Assembly instructions
Shelf life	24 Month
Country of origin	Germany
Customs tariff number	39095090

EAN-UPC	4010311171210			
Base quantity	1	1	24	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Case	Pal. OW	
Lenght	568	568	1200	
Width	353	353	800	
Height	150	150	1130	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	30.076	30.076	1084.8	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	5.234	5.234	143.816	
Net weight	5.234	5.234	125.616	
Weight unit	Kilogram	Kilogram	Kilogram	