Technical-Data-Sheet

CSK

Screw cable lug for Cu and Al

longitudinally sealed for low and medium voltage

Screw cable lug for RM/SM/RE/SE aluminium and copper conductors, suitable for indoor and outdoor terminations.




Product description

Article name	CSK 240-400
Material number	374495
Applications	For connecting conductors RM/SM (class 2), RE/SE (class 1) according to DIN EN/IEC 60228 (VDE 0295)
Family notes	BBC Cellpack counter-holder recommended for installation (see Accessories).
	Application according to AWG, ISWG and BWG standards on request.

Technical-Data-Sheet

Technical data

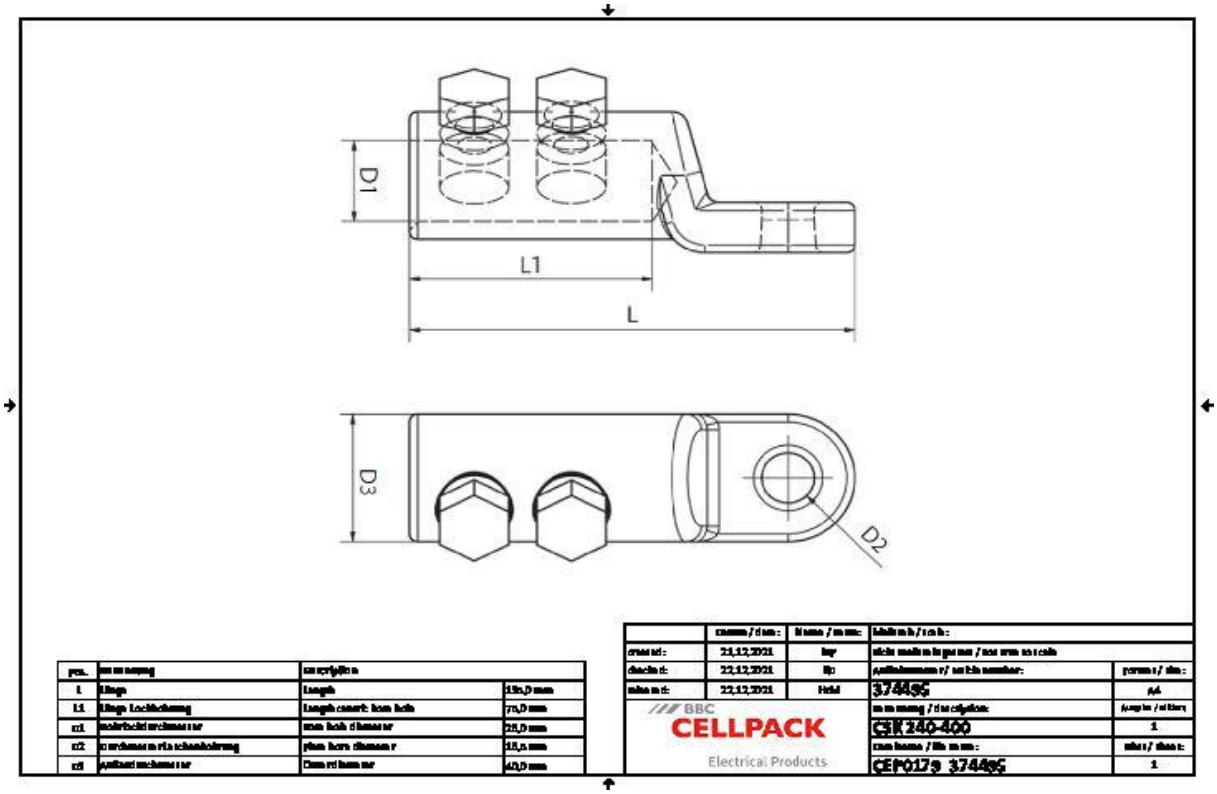

Test standards	IEC 61238-1
Materials	Aluminium tin-plated
Length L	135 mm
Length L1	75 mm
Diameter D1	26 mm
Diameter D2	16.5 mm
Diameter D3	40 mm
Number of bolts	2 Pieces

Logistics data

Delivery scope	Screw cable lug
	Assembly instructions
Country of origin	Germany
Customs tariff number	85369010

EAN-UPC	4010311185392			
Base quantity	1	1	10	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Carton	
Lenght	132	132	300	
Width	72	72	150	
Height	45	45	95	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.428	0.428	4.275	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.275	0.275	3.05	
Net weight	0.275	0.275	2.75	
Weight unit	Kilogram	Kilogram	Kilogram	