AK

Screw branch clamp Al-Cu

for cast resin straight-through and branch

Suitable for connecting and branching aluminium and copper conductors.




Product description

Article name	AK 6
Material number	422460
Characteristics	Brass clamp tin-plated
	Divisible
	Halogen-free
Family notes	Main cable must not be cut.

Technical-Data-Sheet

Technical data

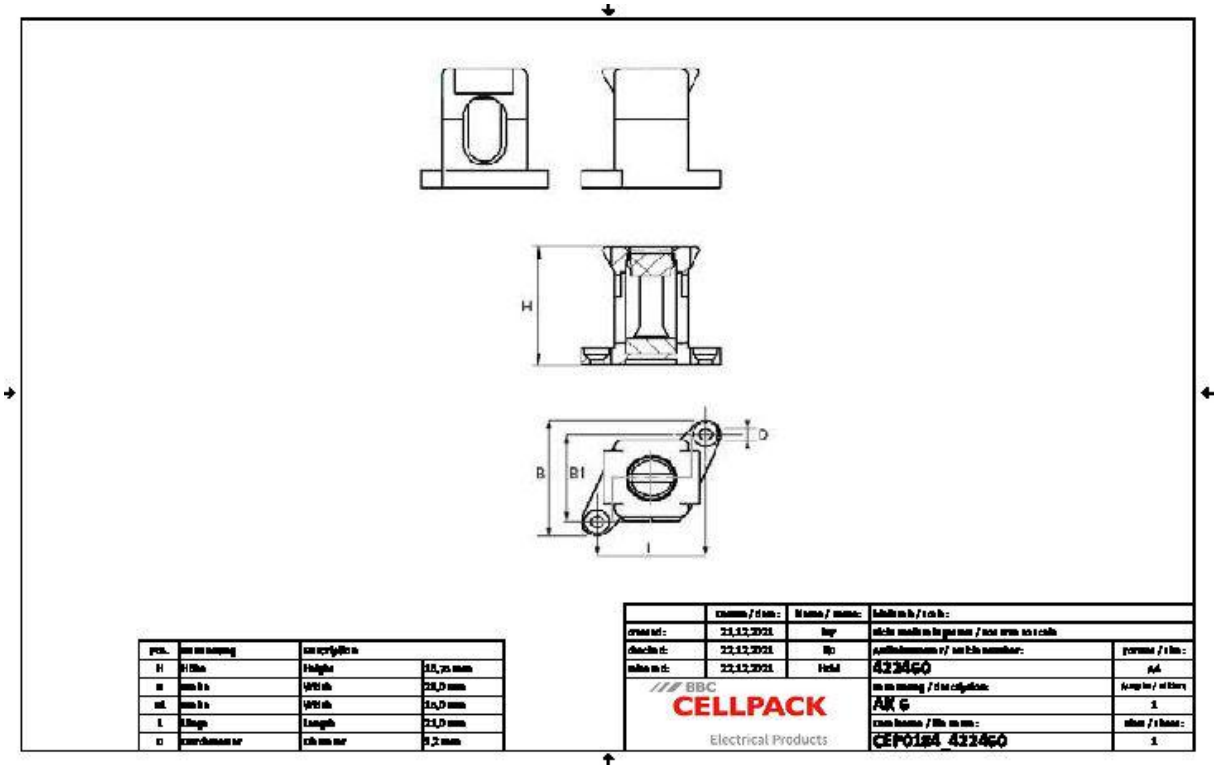

Test standards	EN 60998-2
Selection Note	old
Nominal cross section solid main cable min	2.5 mm²
Nominal cross section solid main cable max	6 mm²
Nominal cross section solid branch cable min	2.5 mm²
Nominal cross section solid branch cable max	6 mm²
Nominal cross section stranded main cable min	2.5 mm²
Nominal cross section stranded main cable max	4 mm²
Nominal cross section stranded branch cable min	2.5 mm²
Nominal cross section stranded branch cable max	4 mm²
Tightening torque	0.8 Nm
Length L	21 mm
Width B	29 mm
Width B1	15 mm
Heigth H	16.75 mm
Diameter D	3.2 mm

Logistics data

Delivery scope	12 Screw branch clamps
Country of origin	Spain
Customs tariff number	85369010

EAN-UPC	4010311192536			
Base quantity	1	12	12	1200
Base unit of measure	Piece	Piece	Piece	Piece
Alternate quantity	1	1	1	1
Alternative unit of measure	Piece	Bag1	Pack	Carton
Lenght	0	178	178	407
Width	0	29	29	87
Height	0	17	17	189
Dimension unit		Millimetres	Millimetres	Millimetres
Volume	0	0.088	0.088	6.692
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	Cubic decimetres
Gross weight	0.007	0.084	0.089	8.7
Net weight	0.007	0.084	0.084	8.4
Weight unit	Kilogram	Kilogram	Kilogram	Kilogram