AK

Screw branch clamp Al-Cu

for cast resin straight-through and branch

Suitable for connecting and branching aluminium and copper conductors.




Product description

Article name	AK 6
Material number	446312
Characteristics	Brass clamp tin-plated
	Divisible
	Halogen-free
Family notes	Main cable must not be cut.

Technical-Data-Sheet

Technical data

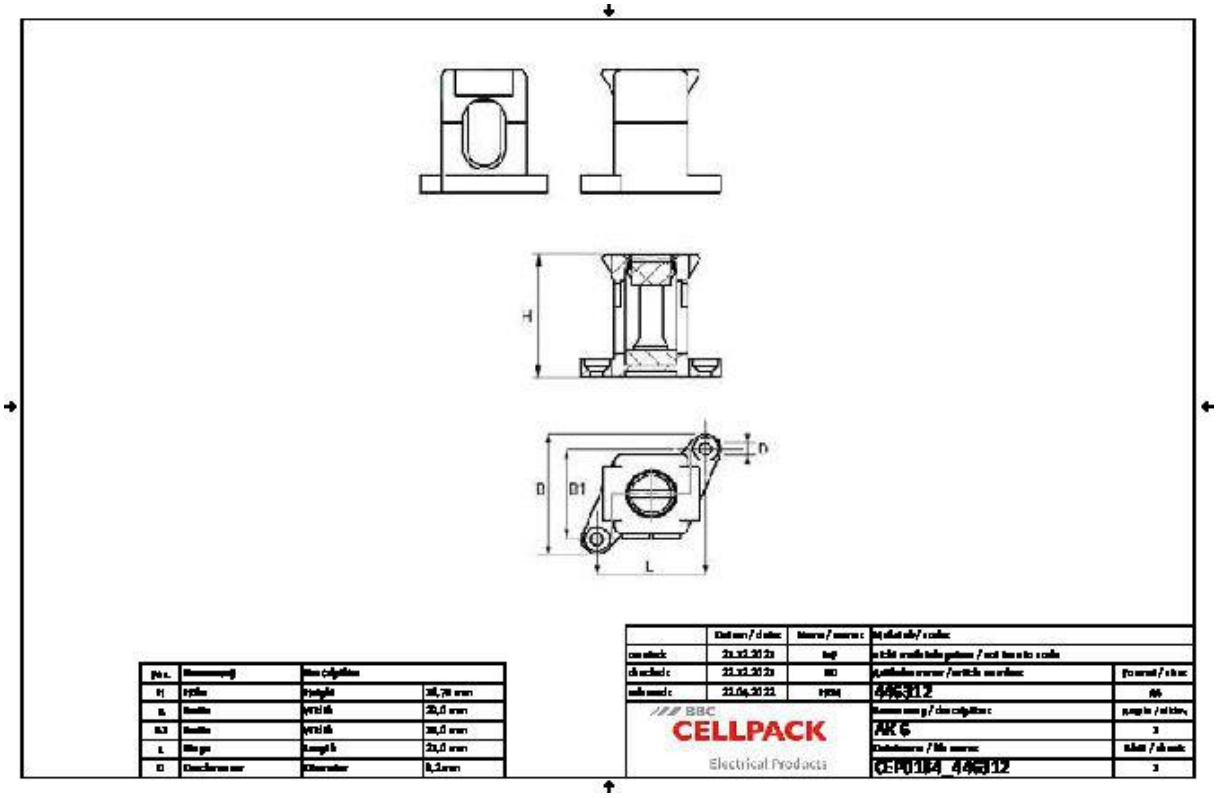

Test standards	EN 60998-2
Selection Note	new
Nominal cross section solid main cable min	2.5 mm²
Nominal cross section solid main cable max	6 mm²
Nominal cross section solid branch cable min	2.5 mm²
Nominal cross section solid branch cable max	6 mm²
Nominal cross section stranded main cable min	2.5 mm²
Nominal cross section stranded main cable max	4 mm²
Nominal cross section stranded branch cable min	2.5 mm²
Nominal cross section stranded branch cable max	4 mm²
Tightening torque	0.8 Nm
Length L	21 mm
Width B	29 mm
Width B1	15 mm
Heigth H	16.75 mm
Diameter D	3.2 mm

Logistics data

Delivery scope	12 Screw branch clamps
Country of origin	Spain
Customs tariff number	85369010

EAN-UPC	4010311198507			
Base quantity	1	1	1	
Base unit of measure	Piece	Piece	Piece	
Alternate quantity	1	1	1	
Alternative unit of measure	Piece	Bag1	Pack	
Lenght	21	400	400	
Width	29	150	150	
Height	17	50	50	
Dimension unit	Millimetres	Millimetres	Millimetres	
Volume	0.01	3	3	
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	
Gross weight	0.087	0.087	0.087	
Net weight	0.087	0.087	0.087	
Weight unit	Kilogram	Kilogram	Kilogram	