

type number: **5820/20\_S**  
**5820/21\_S**  
**5820/30\_XX**  
**5820/31\_XX**

product description: Trunking are used to fasten cables using metal tightening strips to create cable trays with maintained functionality during fires. The trunking are attached to the base material using VPO 6.5X40 fire-resistant screws.  
 Trunking 5820/21 and 5820/31 have perforation in central axis of 4,3 x 15 mm for fastening.  
 Trunking 5820/20 and 5820/30 are without perforation.  
 Trunking 5820/20 and 5820/21 have Zn surface finish (Zn layer 15 - 27 µm)  
 Trunking 5820/30 and 5820/31 are without surface finish

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm  
 XX - without surface finish

sales amount: á 3 m




certification: EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R  
 DIN 4102-12 E 90  
 STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

Systems may be supplied with various surface finishes whereas the surface finish does not affect the determined maintained time of operability in fire.

storage: EN 60721-3-1

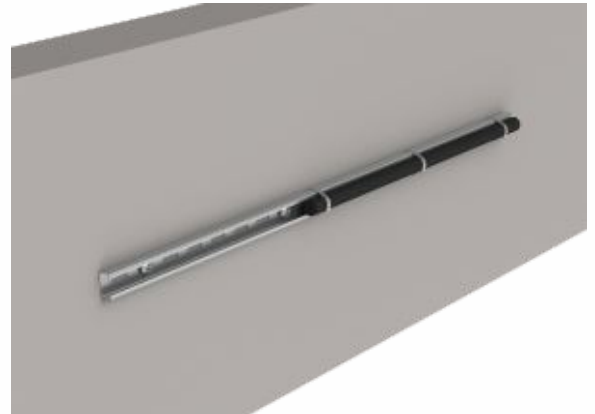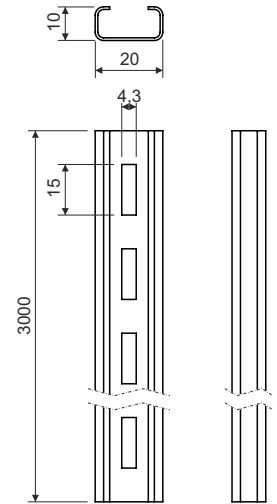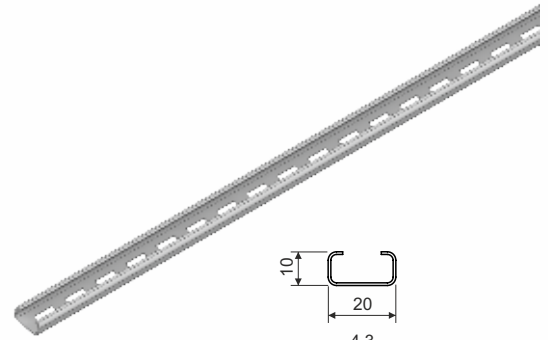

**⚠️ WARNING**

**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



5820