

type number: **KLSU_S**
KLSU_ZM

thickness of metal sheet: 1,5 mm

product description: The cable ladder wall bracket is used to fasten the cable ladder to the wall.
Mounting to the ladder is performed using NSM 6X10 bolts. To protect the cables, the bolt head is inside the cable tray.
ZM surface finish wall bracket shall be used for ZM or F surface finish trays.
GMT surface finish bolts shall be used for ZM or F surface finish trays.
The 8 mm anchor is used for mounting on the wall.




surface finish: S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount: á 1 pc

meets the requirements: ČSN EN 61537:02

classification : ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
Product approved for standard and non-standard constructions.

storage: ČSN EN 60721-3-1

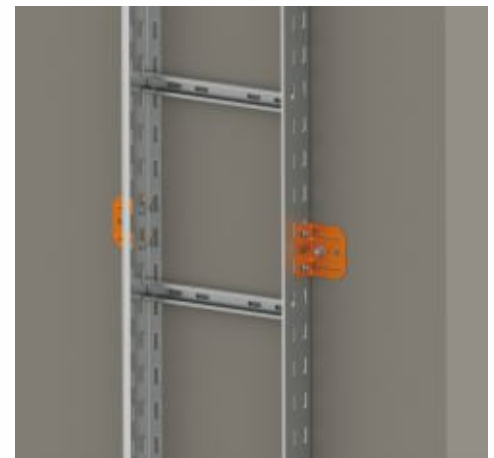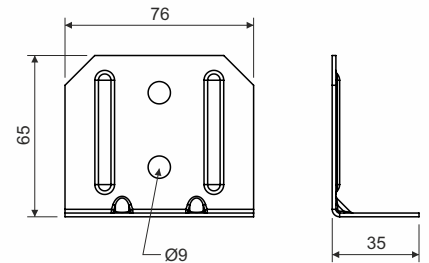

WARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:

