


type number	A	B	thickness of metal sheet	weight
	mm	mm	mm	kg/m
L 25X1.25_S	25	25	1,25	0,83
L 25X1.25_F	25	25	1,25	0,97
L 25x1.50_ZM	25	25	1,5	0,99
L 25X50X1.25_S	25	50	1,25	1,29
L 25X50X1.25_F	25	50	1,25	1,49
L 25x50x1.50_ZM	25	50	1,5	1,55
L 50X50X1.25_S	50	50	1,25	1,71
L 50X50X1.25_F	50	50	1,25	1,98
L 50X50X1.50_S	50	50	1,5	2,05
L 50x50x1.50_ZM	50	50	1,5	2,05



surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 13-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

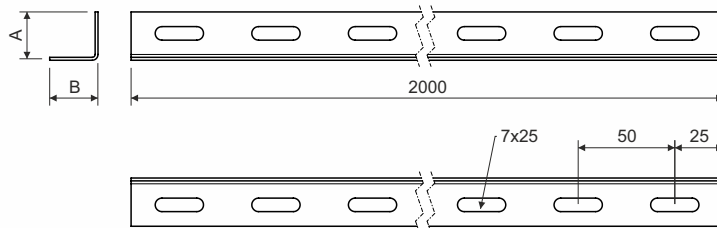

sales amount: á 2 m

storage: EN 60721-3-1

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Risk of system collapse

It is essential to strictly adhere to the maximum load limits for individual cable support systems and ensure proper installation according to the installation manual. The load capacity charts for each system are provided in the manufacturer's catalog, available in printed form or on the manufacturer's website. The specified load limits do not account for any additional loads, such as snow, wind, or seismic forces.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



L-profil



stretch film