

type number	A (mm)	B Ø drilled hole (mm)	C (mm)	D (mm)	weight (kg/pc)
<b>NKP 9_FB</b>	10	15	24	5	0,002
<b>NKP 11_FB</b>	12	18,5	26	6	0,004
<b>NKP 13_FB</b>	16	20	31	6	0,006
<b>NKP 16_FB</b>	17	22	33	6	0,006
<b>NKP 21_FB</b>	24	28	40	7	0,01
<b>NKP 29_FB</b>	31	37	53	7	0,018





**product description:** Bushings serve for the safe passing of the cables through the sheet metal. One part of the bushing is inserted from one side into the created opening in the bottom or the sidewall of the tray, the second part is inserted from the second side and gentle pressure is used to press both the parts together and this connects them firmly.

Bushings can be used on sheet metal 0.5 - 5 mm thick.

**surface finish:** polystyrene

**sales amount:** 1 pc

**storage:** ČSN 64 0090

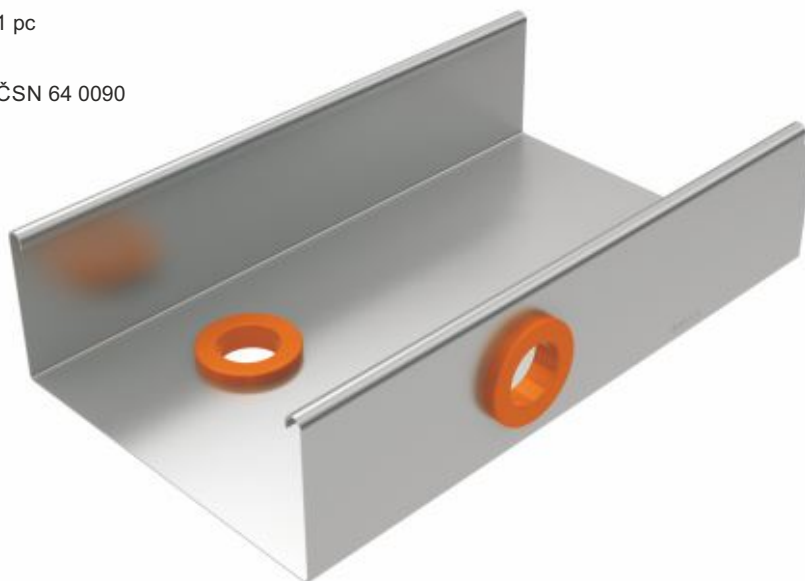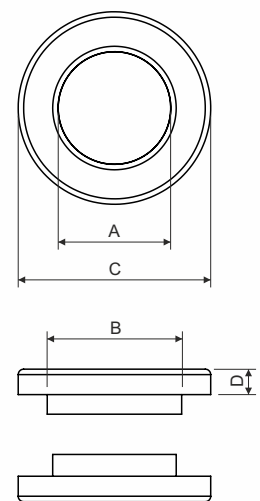

**⚠ WARNING**

**Mechanical damage to cables:**

If the grommet is not correctly sized or not securely seated, friction between the cable and the sheet metal edges may occur during operation, which can result in damage to the cable insulation.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NKP