


type number	height (H) (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
NSUK 50_S	46	1,0	0,07	🔥
NSUK 50_ZM				🔥
NSUK 100_S	97	1,0	0,14	🔥
NSUK 100_ZM				🔥

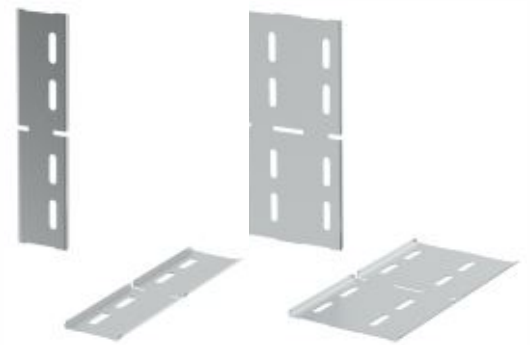

product description: Angle couplings are mostly used at places where the route is slightly bended, for large bending radiuses or for the circumvention of columns and pillars.

The advantage of an angle coupling is that it makes it easy to create a break in a tray of almost any angle.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

Coupling with a ZM surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version

surface finish: S - Pre-Galvanized according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm


sales amount: á 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

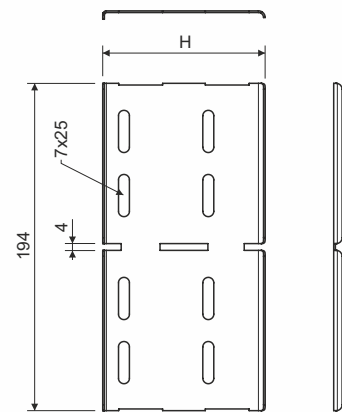

⚠️ WARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recyklační symboly:

