
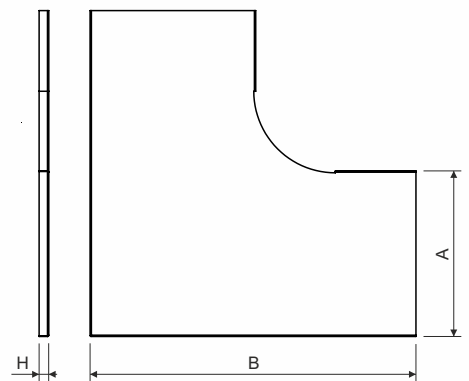


type number	A	B	H	thickness of metal sheet	weight	🔥
	(mm)	(mm)	(mm)	(mm)	(kg/pc)	
NVO 90X62_S	62	222	12	0,55	0,14	🔥
NVO 90X62_F				0,6	0,18	🔥
NVO 90X125_S	125	285	12	0,55	0,29	🔥
NVO 90X125_F				0,8	0,49	🔥
NVO 90X250_S	250	410	12	0,55	0,67	🔥
NVO 90X250_F				0,8	1,15	🔥
NVO 90X500_S	500	660	15	0,7	1,62	🔥
NVO 90X500_F				0,8	2,18	🔥

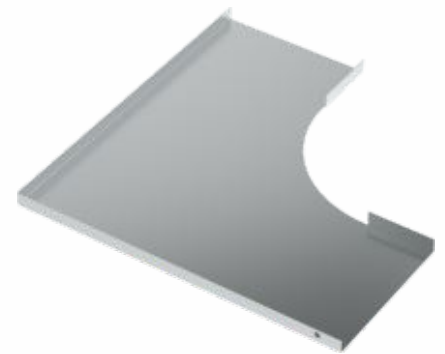

product description: This cover is used to cover the elbow 90°.
 To fix the cover use cover fixtures VU or NUV.
 For the elbow cover NVO 90X500 the outer right angle is replaced by skewed cut.
 These items can also be ordered in a varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

certification: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12E 90
 STN 92 0205PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: ČSN EN 60721-3-1

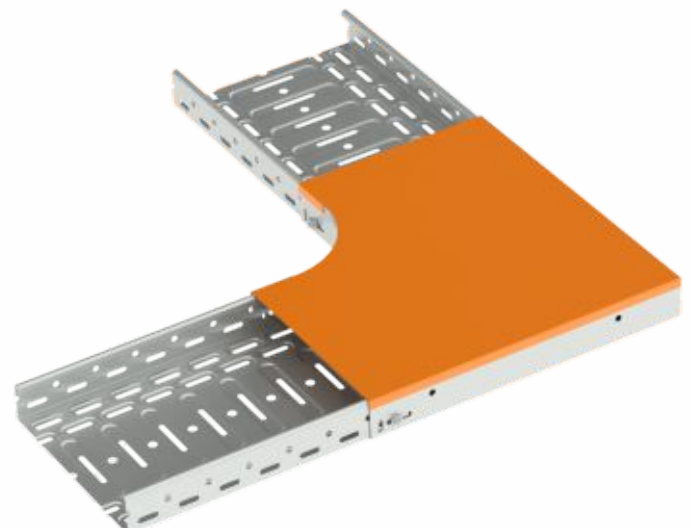

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NVO