

type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
NVSO 90x62_S	62	62	203	12	0,55	0,12	🔥
NVSO 90x62_F					0,6	0,15	🔥
NVSO 90x125_S	125	125	203	12	0,55	0,20	🔥
NVSO 90x125_F					0,8	0,35	🔥
NVSO 90x250_S	250	250	203	12	0,55	0,30	🔥
NVSO 90x250_F					0,8	0,51	🔥
NVSO 90x500_S	500	500	203	15	0,70	0,93	🔥
NVSO 90x500_F					0,8	1,26	🔥



product description: This cover is used to cover the rising elbow NSO.
 To fix the cover use 4 pcs of cover fixtures VU or NUV.
 The covers are supplied straight. They are constructed from a single piece of sheet metal with pre-cut sidewalls for subsequent bending during installation.
 These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)


sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895P 90-R
 DIN 4102-12E 90
 STN 92 0205PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

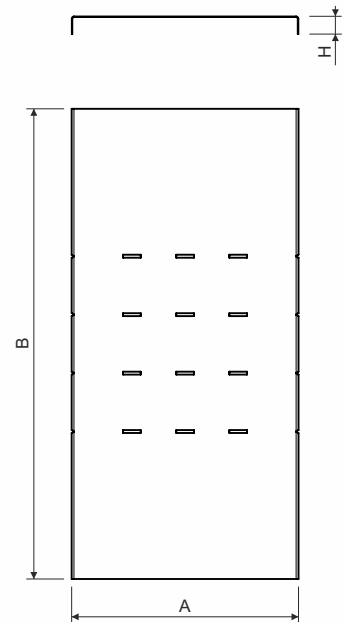

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NVSO