

type number	length L mm	weight kg/pc
SPLN 200_F	201	0,42
SPLN 250_F	255	0,49
SPLN 300_F	301	0,55
SPLN 400_F	401	0,67
SPLN 500_F	501	0,82
SPLN 600_F	601	0,95
SPLN 700_F	705	1,09
SPLN 800_F	805	1,22
SPLN 900_F	905	1,35
SPLN 1000_F	1005	1,49
SPLN 1100_F	1105	1,62
SPLN 1200_F	1205	1,75



OKSPLN



product description: The ceiling profile is used as an element to create a supporting structure for a cable tray and to attach it to the ceiling or floor.



Designated for one sided fastening of the brackets DS, DT and DTN with the use of the bolt with a hexagonal head S 10X20, nut ML 10 and washer PD 10.

For safety purposes, the bracket are fasted min. 5 cm from the end of the profile and the end of the profile may be fitted with an OKSPLN protective cover.

surface finish: F - Hot Dip Galvanized according to EN ISO 1461, zinc-layer 55 µm (min. 45 µm)

sales amount: á 1 pc

storage: EN 60721-3-1

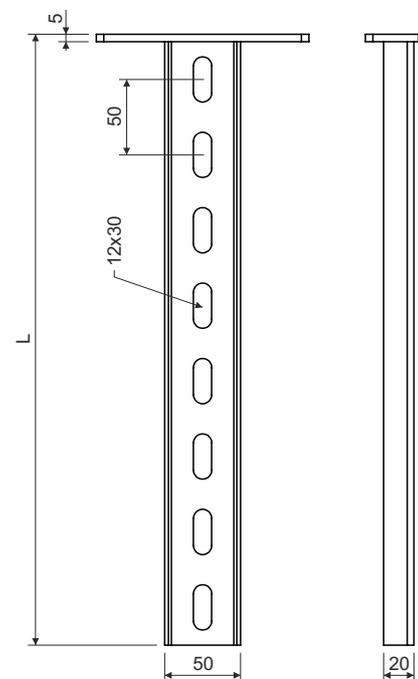

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



SPLN