
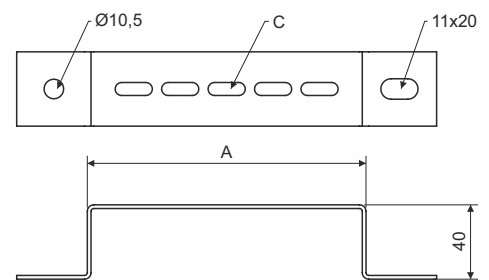


type number	A (mm)	B (mm)	C perforation (mm)	weight (kg/pc)
VMB 100_S	100	40	7x20 in one line	0,15
VMB 100_F				0,17
VMB 150_S	150	40	7x20 in one line	0,17
VMB 150_F				0,20
VMB 200_S	200	40	7x20 in one line	0,20
VMB 200_F				0,23
VMB 300_S	300	50	7x32 in two lines	0,32
VMB 300_F				0,37
VMB 400_S	400	50	7x32 in two lines	0,39
VMB 400_F				0,44
VMB 500_S	500	50	7x32 in two lines	0,46
VMB 500_F				0,51
VMB 600_S	600	50	7x32 in two lines	0,53
VMB 600_F				0,58

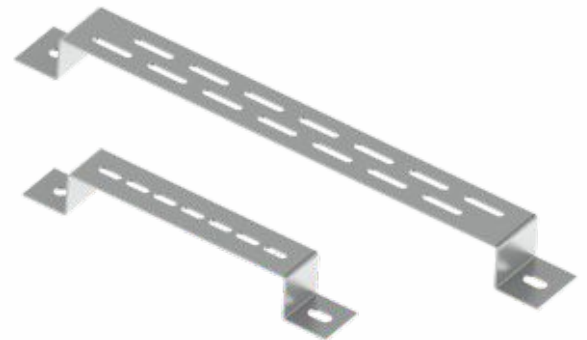

product description: This bracket is used to attach the cable tray to the floor or the wall. The cable tray is fastened using NSM 6X10 bolts. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish. The bracket is attached to the base using Ø 10 mm anchors.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

psales amount: 1 pc

meets the requirements: ČSN EN 61537:02

storage: ČSN EN 60721-3-1



 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



VMB