


type number	for width of cable tray (mm)	A (mm)	B (mm)	C (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
<b>VT 50_S</b>						0,55	0,22	🔥
<b>VT 50_F</b>	50	50	254	453	12	0,80	0,36	🔥
<b>VT 50_ZM</b>						0,75	0,30	🔥
<b>VT 75_S</b>	75	75	279	478	12	0,55	0,30	🔥
<b>VT 100_S</b>						0,55	0,39	🔥
<b>VT 100_F</b>	100	100	304	503	12	0,80	0,65	🔥
<b>VT 100_ZM</b>						0,75	0,52	🔥
<b>VT 150_S</b>						0,55	0,57	🔥
<b>VT 150_F</b>	150	150	354	553	12	0,80	0,97	🔥
<b>VT 200_S</b>						0,80	1,14	🔥
<b>VT 200_F</b>	200	200	404	603	12	0,80	1,33	🔥
<b>VT 200_ZM</b>						0,75	1,05	🔥
<b>VT 300_S</b>						1,00	2,32	🔥
<b>VT 300_F</b>	300	300	504	703	12	1,00	2,69	🔥
<b>VT 300_ZM</b>						1,00	2,32	🔥
<b>VT 400_S</b>						1,00	3,40	🔥
<b>VT 400_F</b>	400	400	604	803	15	1,00	3,95	🔥
<b>VT 400_ZM</b>						1,00	3,40	🔥
<b>VT 500_S</b>						1,00	4,62	🔥
<b>VT 500_F</b>	500	500	704	903	15	1,00	5,36	🔥
<b>VT 500_ZM</b>						1,00	4,62	🔥
<b>VT 600_S</b>						1,00	6,00	🔥
<b>VT 600_F</b>	600	600	804	1003	15	1,00	6,96	🔥

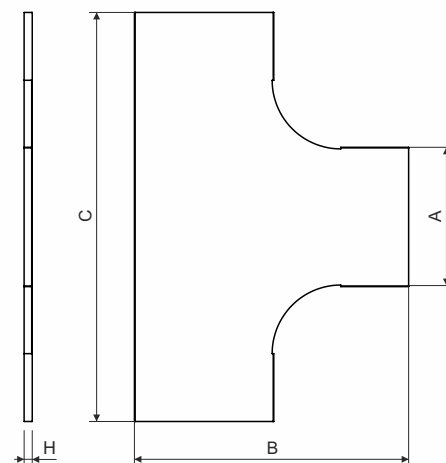

product description: This cover is used to cover the T-piece.  
To fix the cover use 6 pcs of cover fixtures VU or NUV.  
These items can also be ordered in varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm  
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)  
ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895P 90-R  
DIN 4102-12E 90  
STN 92 0205PS 90  
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

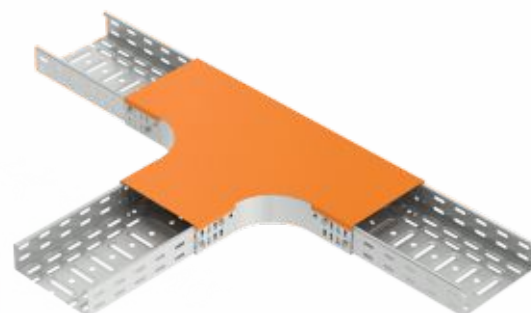

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



T-piece cover