



00175569919121

Altivar - Lexium**Line motor choke****VW3A4551...565, 568...572**

VW3A4551	10 mH - 4 A
VW3A4552	4 mH - 10 A
VW3A4553	2 mH - 17 A
VW3A4554	1 mH - 31 A
VW3A4555	0,5 mH - 60 A
VW3A4556	0,3 mH - 107 A
VW3A4557	0,15 mH - 230 A
VW3A4558	0,155 mH - 184 A
VW3A4559	0,12 mH - 222 A
VW3A4560	0,098 mH - 264 A
VW3A4561	0,066 mH - 344 A
VW3A4562	0,049 mH - 455 A

VW3A4563	0,038 mH - 540 A
VW3A4564	0,038 mH - 613 A
VW3A4565	0,032 mH - 720 A
VW3A4568	0,085 mH - 300 A
VW3A4569	0,060 mH - 450 A
VW3A4570	0,22 mH - 160 A
VW3A4571	0,23 mH - 230 A
VW3A4572	0,1 mH - 450 A

**DANGER****HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH**

- Only appropriately trained persons who are familiar with and fully understand the contents of the present manual and all other pertinent product documentation and who have received all necessary training to recognize and avoid hazards involved are authorized to work on and with this equipment.
- Installation, adjustment, repair, and maintenance must be performed by qualified personnel.
- Verify compliance with all local and national electrical code requirements as well as all other applicable regulations with respect to grounding of all equipment.
- Before performing work and/or applying voltage on the equipment, follow the instructions given in the appropriate installation manual.

Failure to follow these instructions will result in death or serious injury.

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this product. © 2026 Schneider Electric. All Rights Reserved.



MANUFACTURER
Schneider Electric Industries SAS
1884 Boulevard de la Défense
92000 Nanterre France

UK REPRESENTATIVE
Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL United Kingdom




Опция для продуктов Altivar и Altistart.
Пожалуйста, обратитесь к сообщению о преобразователе частоты EAC / программном сартере в приложении к началу работы, размещенном на веб-сайте производителя.
Авторизованный поставщик в Республике Казахстан:
ТОО «Шнейдер Электрик»
Адрес: 050010, РК, г. Алматы, пр. Достык, 38, бизнес-центр «Кен Дала», 5 этаж, левое крыло.
Тел.: +7 (727) 339 23 57
Номер службы поддержки клиентов:
Тел.: +7 (727) 339 24 52

Altivar және Altistart өніміне арналған опция.
Өндірушінің веб-сайтында орналастырылған «Жұмысқа кірісу» қосымшасындағы EAC жиілік инвертер / бірқалыпты іске қосу құрылғысы хабарламасына сілтеме жасауыңызды сұраймыз.
Қазақстан Республикасындағы уәкілетті жеткізуші:
ЖШС «Шнейдер Электрик»
Мекен-жайы: 050010, ҚР, Алматы қаласы, Достық даңғылы, 38, «Кең дала» бизнес орталығы, 5-қабат, сол қанат.
тел.: +7 (727) 339 23 57
Клиенттерге қызмет көрсету нөмірі:
тел.: +7 (727) 339 24 52

VW3A4551 ... VW3A4553

IP 00

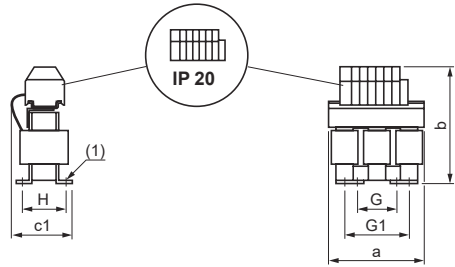


VW3	mm	a	b	c1	G	G1	H	(1)
A4551		100	135	60	40	60	42	8 x (Ø 6 x 9)
A4552		130	155	90	60	80,5	62	8 x (Ø 6 x 12)
A4553		130	155	90	60	80,5	62	8 x (Ø 6 x 12)

1 inch = 25,4 mm

VW3A4554 ... VW3A4555

IP 00

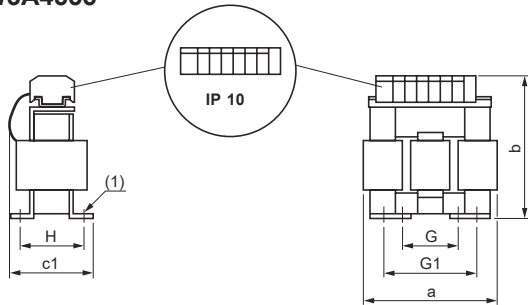


VW3	mm	a	b	c1	G	G1	H	(1)
A4554		155	170	135	75	107	90	8 x (Ø 6 x 12)
A4555		180	210	160	85	122	105	8 x (Ø 6 x 12)

1 inch = 25,4 mm

VW3A4556

IP 00

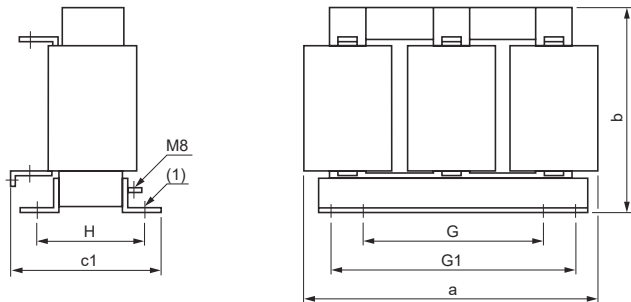


VW3	mm	a	b	c1	G	G1	H	(1)
A4556		270	210	180	105	181	100	8 x (Ø 1 1 x 22)

1 inch = 25,4 mm

VW3A4557

IP 00

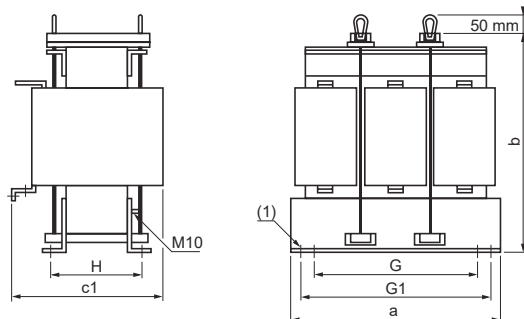


VW3	mm	a	b	c1	G	G1	H	(1)
A4557		320	290	215	190	230	142	8 x (Ø 11 x 22)

1 inch = 25,4 mm

VW3A4558 ... 572


IP 00

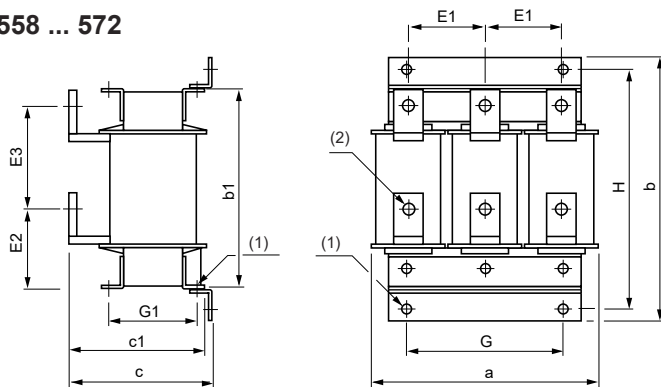


VW3	mm	a	b	b1	c	c1	G	G1	H	E1	E2	E3	(1)	(2)
A4558	280	330	260	210	200	200	200	125	300	90	115	80	Ø 9	Ø 10.5
A4559	320	380	300	210	200	225	120-160	350	100	80	150	150	Ø 11	Ø 11
A4560	320	380	300	210	200	225	150	350	100	86	150	150	Ø 11	Ø 11
A4561	320	380	300	250	230	225	145-175	350	100	86	150	150	Ø 11	Ø 13
A4562	320	380	300	250	230	225	150	350	100	86	150	150	Ø 11	Ø 13
A4563	320	380	300	250	230	225	150-165	350	100	86	150	150	Ø 11	Ø 13
A4564	385	440	340	265	245	300	125-165	400	120	130	190	190	Ø 13.5	2xØ 13
A4565	385	445	340	275	250	300	165	400	120	130	190	190	Ø 13.5	2xØ 13
A4568	320	385	300	210	200	225	140	340	100	80	150	150	Ø 11	Ø 11
A4569	320	385	300	250	230	225	170	340	100	86	150	150	Ø 11	Ø 13
A4570	280	305	240	210	200	200	125	275	90	90	100	100	Ø 9	Ø 8.5
A4571	385	440	340	265	245	300	115-150	400	120	85	190	190	Ø 13.5	Ø 13
A4572	385	440	340	305	295	300	175-205	400	120	85	190	190	Ø 13.5	Ø 13

1 inch = 25,4 mm

VW3A4551 ... 556

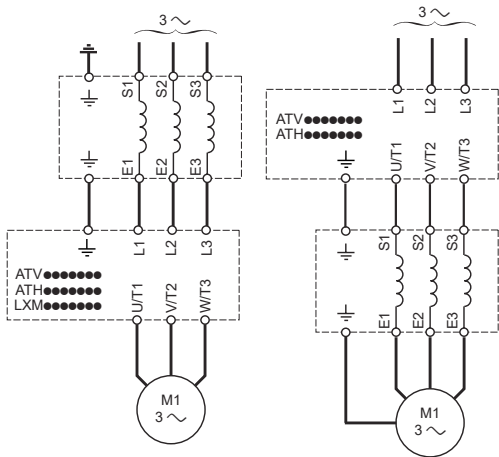



VW3A4551 ... 555




Ref	Screwdriver type (Flat screwdriver) Ø mm (in)	Torque Min-Max N.m (lbf.in)
VW3A4551	3.5 (0.138)	0.5 - 1 (4.42 - 8.85)
VW3A4552		
VW3A4553	4 - 5 (0.157 - 0.197)	0.8 - 1 (7.08 - 8.85)
VW3A4554	5.5 (0.217)	1.2 - 1.4 (10.62 - 12.39)
VW3A4555	6.5 - 7 (0.236 - 0.275)	2.8 - 3 (24.78 - 26.55)

VW3A4556


Ref	Screw size	Tightening Torque N.m (lbf.in)
VW3A4556	M6	9.5 (84)

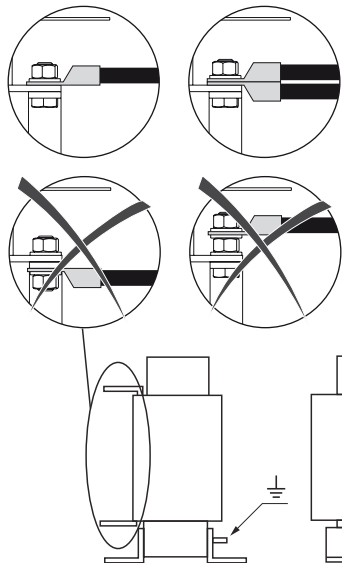


VW3A4557 ... 572

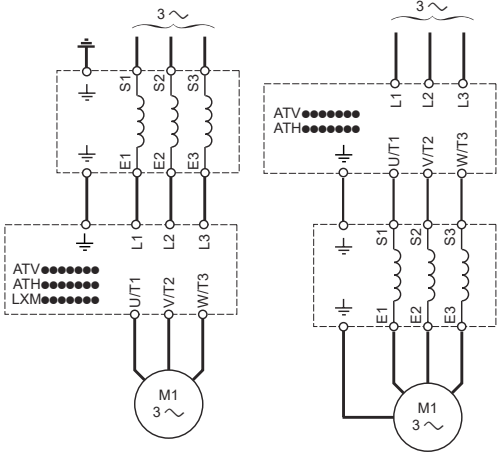

**2 x VW3A4569
2 x VW3A4564**

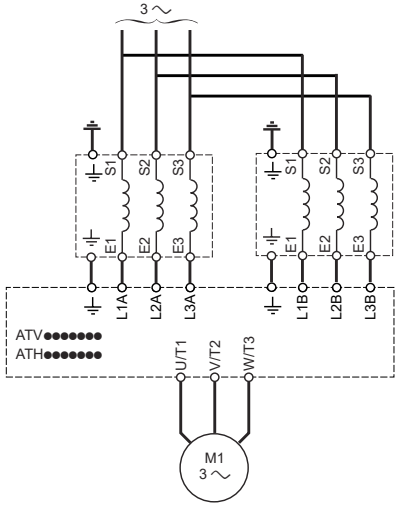

VW3A4557 ... 572

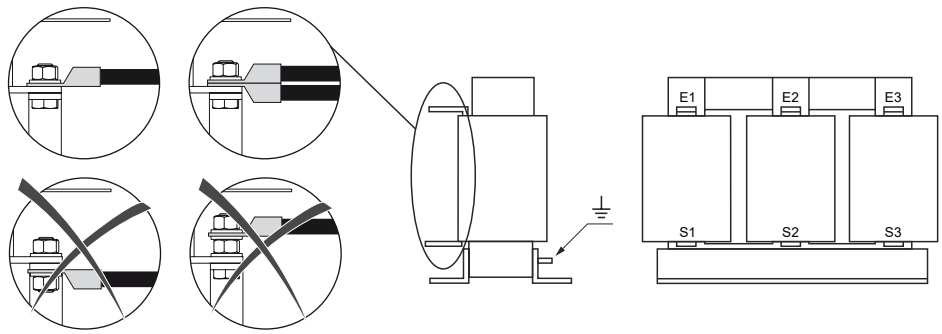

⚠ CAUTION**SHARP EDGES**

Use all necessary personal protective equipment (PPE) such as gloves when performing any type of work whatsoever on or with this product.

Failure to follow these instructions can result in injury or equipment damage.

