# Technical-Data-Sheet

## DK-CU-V

### Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




## Product description

| | |
|---|---|
| Article name | DK-CU-V 500/16 |
| Material number | 126098 |
| Applications | Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295) |
| Family notes | To be used with suitable crimping tool with DIN inserts |

# Technical-Data-Sheet

## Technical data

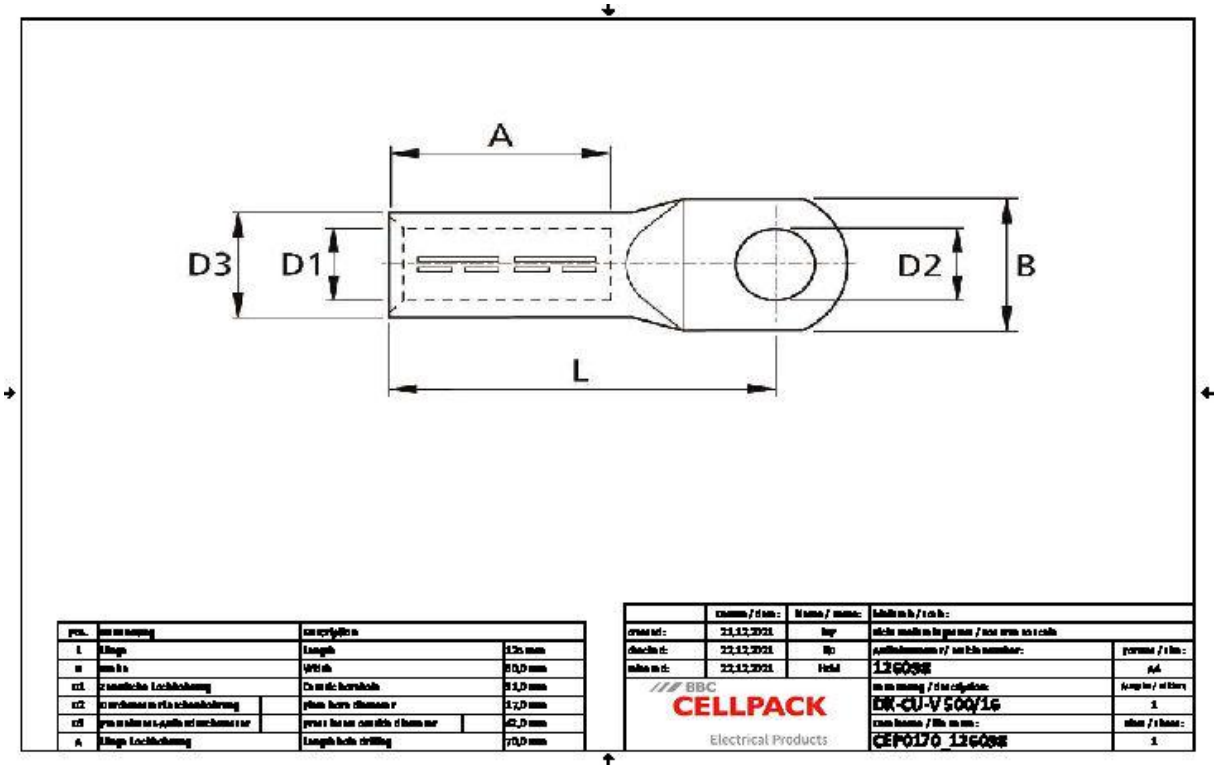


| | |
|---|---|
| Test standards | DIN 46235 |
| | IEC 61238 |
| Materials | Copper tin-plated |
| Length L | 125 mm |
| Width B | 60 mm |
| Diameter D1 | 31 mm |
| Diameter D2 | 17 mm |
| Diameter D3 | 42 mm |
| Nominal cross section min | 500 mm² |
| Press die code K | 42 mm |
| Length A | 70 mm |

## Logistics data

| | |
|---|---|
| Delivery scope | Compression cable lug |
| Country of origin | Slovakia |
| Customs tariff number | 85369010 |

| | | | | |
|---|---|---|---|---|
| EAN-UPC | 4010311052656 | | | |
| Base quantity | 1 | 1 | | |
| Base unit of measure | Piece | Piece | | |
| Alternate quantity | 1 | 1 | | |
| Alternative unit of measure | Piece | Carton | | |
| Lenght | 167 | 167 | | |
| Width | 88 | 88 | | |
| Height | 65 | 65 | | |
| Dimension unit | Millimetres | Millimetres | | |
| Volume | 0.955 | 0.955 | | |
| Volume unit | Cubic decimetres | Cubic decimetres | | |
| Gross weight | 0.884 | 0.884 | | |
| Net weight | 0.884 | 0.884 | | |
| Weight unit | Kilogram | Kilogram | | |