

item number	for width of cable tray (A) mm	height H mm	B mm	thickness of metal sheet mm	weight kg/pc	🔥
<b>NIXVSO 90X62_IX</b>	62	15	338	0,6	0,15	🔥
<b>NIXVSO 90X125_IX</b>	125	15	338	0,6	0,25	🔥
<b>NIXVSO 90X250_IX</b>	250	15	338	0,6	0,45	🔥
<b>NIXVSO 90X500_IX</b>	500	15	338	0,6	0,86	🔥



**product description:** This cover is used to cover the rising elbow NIXSO.  
To fix the cover use cover fixtures NIXUV and NIXSM 6X10 bolt.  
The covers are supplied straight. They are constructed from a single piece of sheet metal with pre-cut sidewalls for subsequent bending during installation.


**material:** IX - stainless steel AISI 304  
(AISI 316, AISI 316L only to order)

**sales amount:** á 1 pc

**meets the requirements:** ČSN EN 61537:02

**classification 🔥:** ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90  
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

**storage:** ČSN EN 60721-3-1

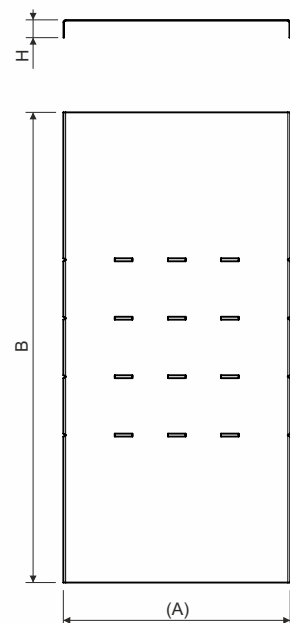

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NIXVSO